

A person is walking away from the camera down a path in a forest. The path is covered in fallen leaves. The trees are bare, and the sunlight is streaming through the canopy, creating a warm, golden glow. The person is silhouetted against the bright light.

# LUXURY VINYL TILES

PRIMERO II | ULTIMO II | MATRIX ACOUSTIC | AMTICO FIRST | AMTICO SPACIA ACOUSTIC

**B.**

**Belgotex®**

## WHO ARE WE?

At Belgotex we believe that everything we do should creatively challenge the flooring / interiors status quo. Belgotex has 30 years proven experience in the New Zealand flooring market. We stand by our products, and pride ourselves on the innovation and quality that we bring to the market every day.

### Why choose Belgotex Luxury Vinyl Tiles?

These ranges have been designed to fit current and future trends in the New Zealand market. As well as choosing a beautiful floor, our Luxury Vinyl Tiles will also provide many more benefits for your space. All of our products have a Superguard® protective layer, which means that your floor will resist stains, scratches, and scuffs better than other floors, so you can spend more time enjoying your floor, and less time cleaning it. Your floor will be the envy of anyone that sees it!



## LUXURY VINYL TILES



### PRIMERO II

- 2.25mm thickness with a 0.3mm wear layer.
- Residential collection.
- Realistic, natural look.
- A choice of 9 carefully chosen wood patterns and colours.
- Class 23 Domestic Heavy / Class 31 Commercial Light.

5

### ULTIMO II

- 2.5mm thickness with a 0.55mm wear layer.
- Longest and widest plank size.
- Ideally suited for both residential and commercial environments.
- 9 beautiful wood patterns and colours to choose from.
- Class 23 Domestic Heavy / Class 33 Commercial Heavy / Class 42 Industrial Medium.

11

### MATRIX ACOUSTIC

- 5.0mm thickness with a 0.7mm wear layer.
- Acoustic - it will reduce noise levels in a room by up to 8 decibels\*.
- Extremely durable.
- Seamless transition to carpet tiles or other flooring.
- 7 great colours and patterns.
- Class 23 Domestic Heavy / Class 34 Commercial Very Heavy / Class 43 Industrial Heavy.

17

### AMTICO FIRST

- 2.0mm thickness with a 0.3mm wear layer.
- Premium LVT.
- 13 stocked colours and a further 26 indent colours.
- Highly realistic finish with a robust construction.
- Class 23 Domestic Heavy / Class 31 Commercial Light.

23

### AMTICO SPACIA ACOUSTIC

- 3.5mm thickness with a 0.55mm wear layer.
- Premium LVT.
- Acoustic - it will reduce noise levels in a room by up to 18 decibels\*.
- 7 stocked colours and a further 97 indent colours.
- Class 23 Domestic Heavy / Class 33 Commercial Heavy / Class 42 Industrial Medium

29

\* Tested to ISO 10140-3. | The colours shown may vary slightly from the actual product and should be used as a guide only.




## PRIMERO II



Construction	Luxury Vinyl Tile
Plank Size	163mm x 988mm
Tiles per Carton	24pcs / 3.87m <sup>2</sup>
Wear Layer Thickness	0.30mm
Total Thickness	2.25mm
Bevel	4-sided micro-bevel
Surface Protection	Superguard®
Slip Resistance	DS - R10 (EN 13893 / DIN 51130)
Fire Test	ISO 9239-1
Classification	Class 23 Domestic Heavy / Class 31 Commercial Light
Warranties	20 Year Residential Warranty / 10 Year Commercial Warranty
Installation	Please contact Gilt Edge Industries for all adhesive and installation instructions. NB: If recommended adhesive is not used, claims will not be accepted. Must be laid in accordance with AS/NZ Installation Standards.

- For samples, range and warranty details please contact us on 0800 377 753 or [www.belgotex.co.nz](http://www.belgotex.co.nz)
- Specifications are based on averages from manufacturing processes and may vary within normal industry tolerances.
- This product is intended for use solely as an indoor floor covering and is not recommended or sold for any other purpose.
- Use entryway systems outside each entrance to prevent dirt, sand, grit and other substances from being tracked onto floor.
- Rubber Migration:** Rubber migration (also known as Plasticiser Migration) is a condition that can cause vinyl to discolour. It is caused by rubber or latex products, eg rubber or latex-soled slippers, shoes and rubber backed mats, coming into contact with the vinyl over a constant period of time. It is neither a manufacturing nor an installation fault and therefore is not covered by our warranties.

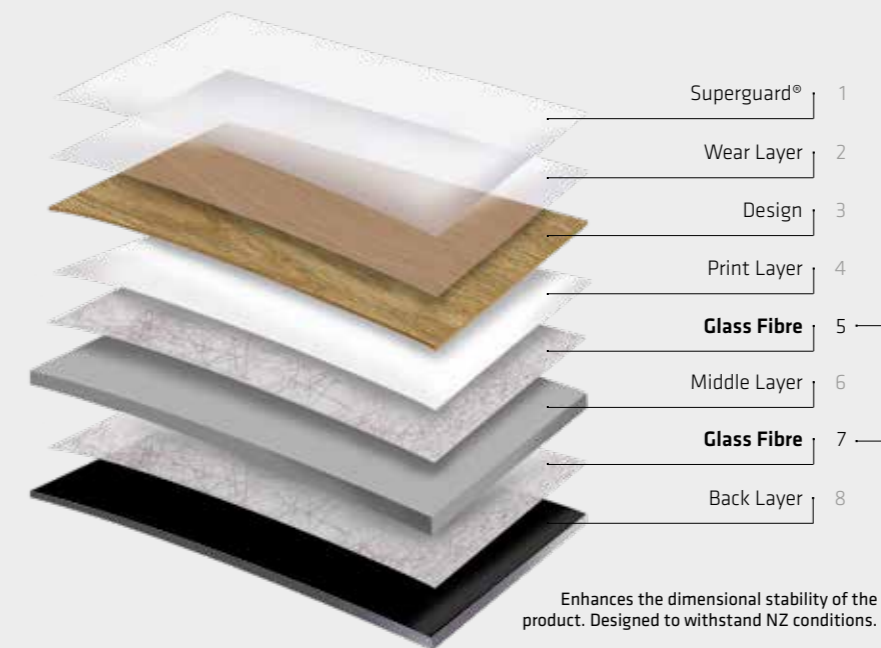

# PRIMERO II

## EVERGREEN OAK



22937

## MAJOR OAK



24241



24847




24886




24982

# PRIMERO II


## SUMMER OAK

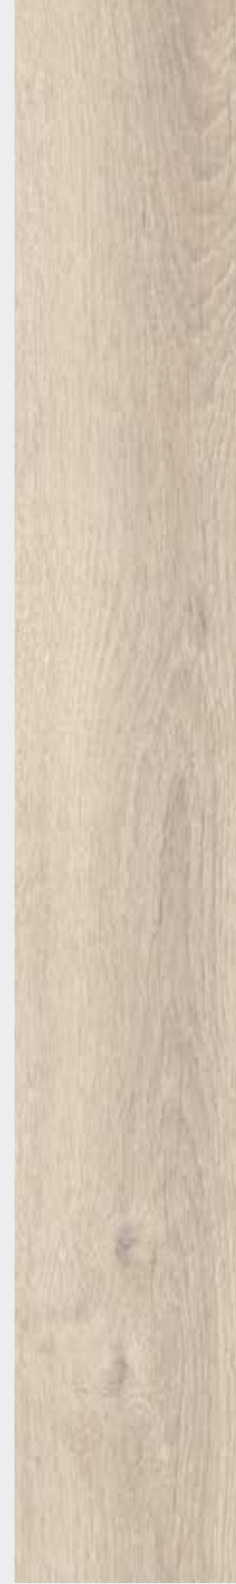


24137

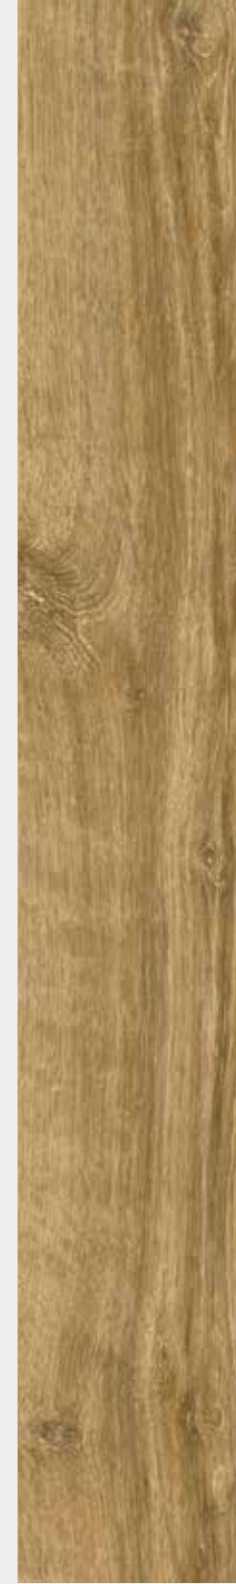

24235

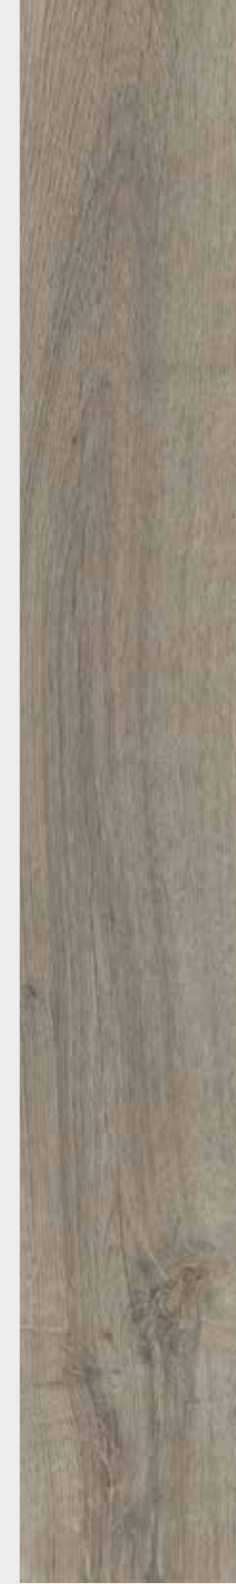

24935

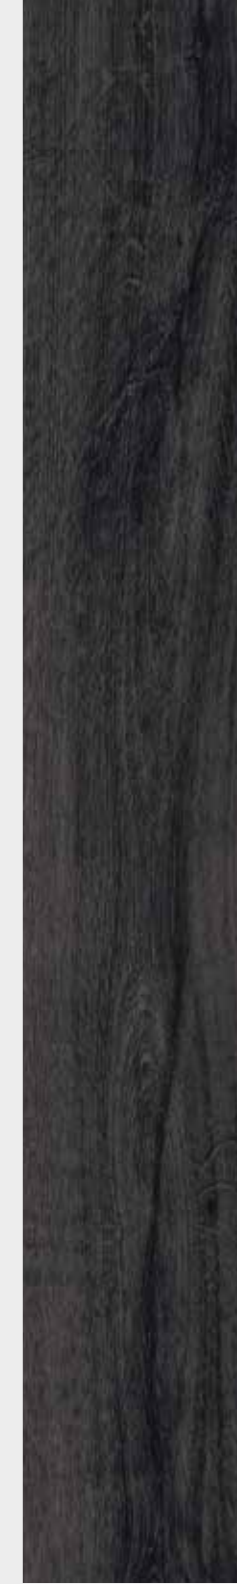

24989



Primero II Summer Oak 24935




# ULTIMO II



<b>Construction</b>	Luxury Vinyl Tile
<b>Plank Size</b>	Classic Plank - 196mm x 1320mm London Plank - 94mm x 282mm
<b>Tiles per Carton</b>	Classic Plank - 14pcs / 3.62m <sup>2</sup> London Plank - 92pcs / 2.44m <sup>2</sup>
<b>Wear Layer Thickness</b>	0.55mm
<b>Total Thickness</b>	2.5mm
<b>Bevel</b>	V-groove, 4-sided bevel
<b>Surface Protection</b>	Superguard®
<b>Slip Resistance</b>	DS - R10 (EN 13893 / DIN 51130)
<b>Fire Test</b>	ISO 9239-1
<b>Classification</b>	Class 23 Domestic Heavy / Class 33 Commercial Heavy / Class 42 Industrial Medium
<b>Warranties</b>	20 Year Residential Warranty / 10 Year Commercial Warranty
<b>Installation</b>	Please contact Gilt Edge Industries for all adhesive and installation instructions. NB: If recommended adhesive is not used, claims will not be accepted. Must be laid in accordance with AS/NZ Installation Standards.

- For samples, range and warranty details please contact us on 0800 377 753 or [www.belgotex.co.nz](http://www.belgotex.co.nz)
- Specifications are based on averages from manufacturing processes and may vary within normal industry tolerances.
- This product is intended for use solely as an indoor floor covering and is not recommended or sold for any other purpose.
- Use entryway systems outside each entrance to prevent dirt, sand, grit and other substances from being tracked onto floor.
- **Rubber Migration:** Rubber migration (also known as Plasticiser Migration) is a condition that can cause vinyl to discolour. It is caused by rubber or latex products, eg rubber or latex-soled slippers, shoes and rubber backed mats, coming into contact with the vinyl over a constant period of time. It is neither a manufacturing nor an installation fault and therefore is not covered by our warranties.

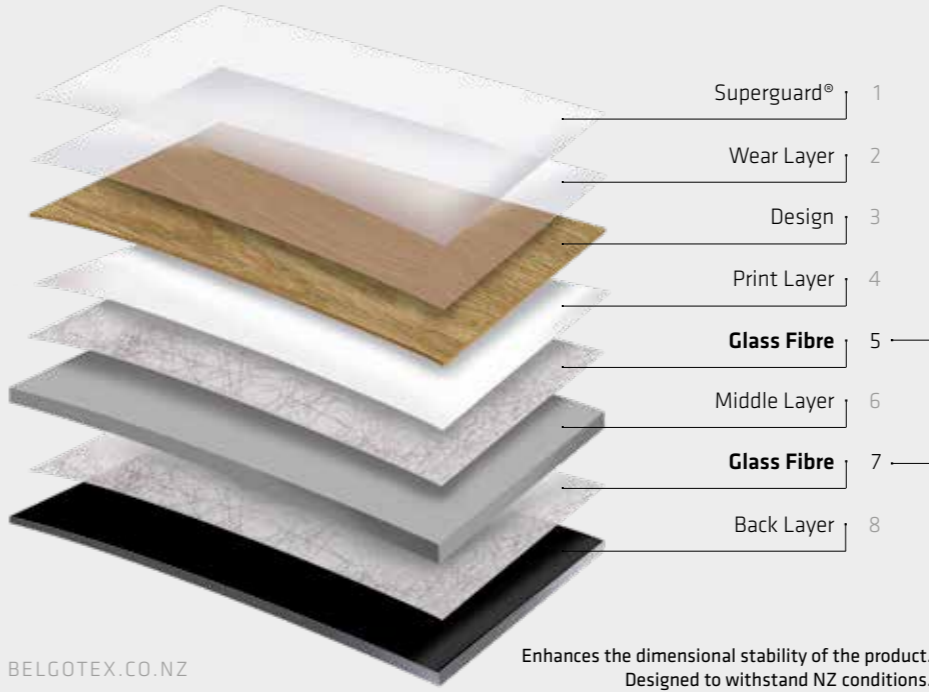

Enhances the dimensional stability of the product. Designed to withstand NZ conditions.

Ultimo II Casablanca Oak 24890

# ULTIMO II

## CASABLANCA OAK



24123



24890



24983

## COLUMBIA PINE




24243




24450

# ULTIMO II

## SUMMER OAK

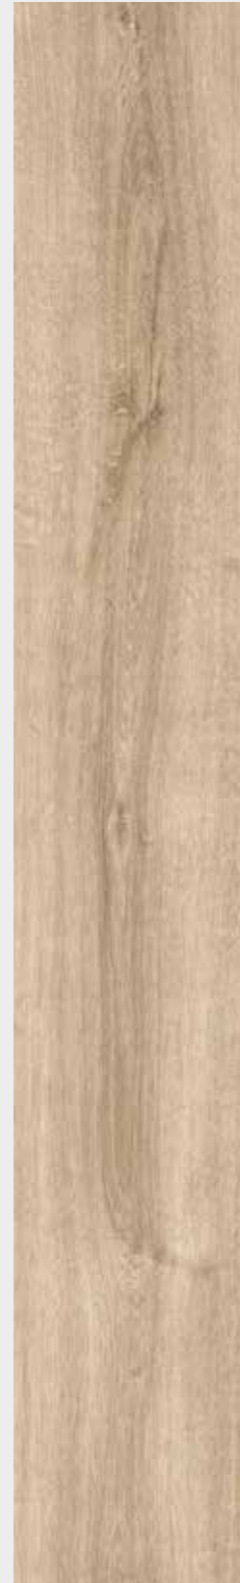

24219

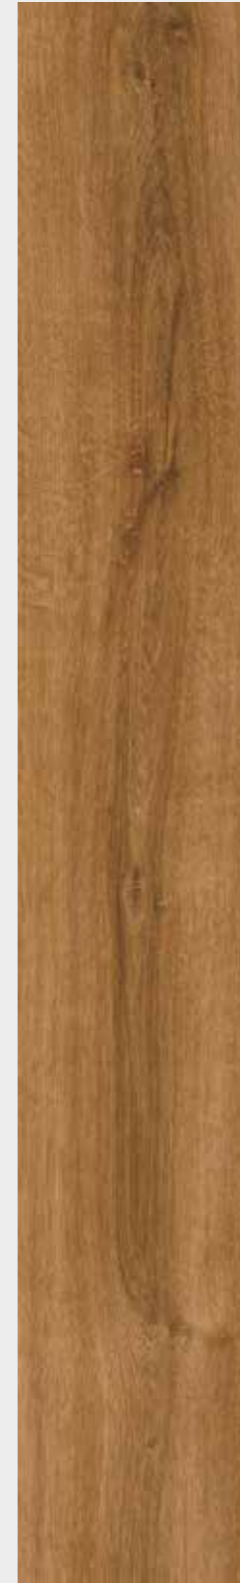

24244



24867

## LONDON PLANK


A smaller plank offers more creative installations.

### SUMMER OAK



24219

### COLUMBIA PINE

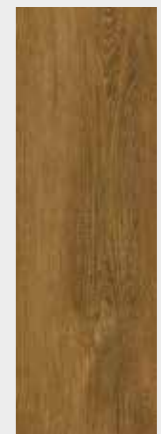

24450




HOME





## MATRIX ACOUSTIC

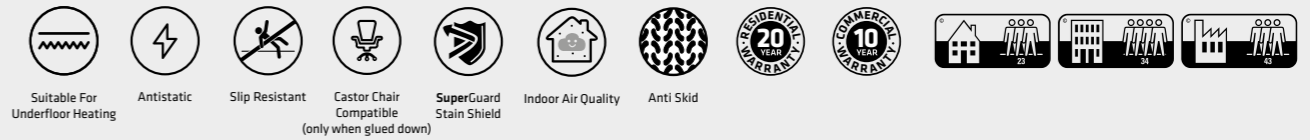

Construction	Acoustic Luxury Vinyl Tile
Plank Size	178mm x 1220mm
Tiles per Carton	10pcs / 2.17m <sup>2</sup>
Wear Layer Thickness	0.70mm
Total Thickness	5.0mm
Bevel	V-groove, 4-sided bevel
Surface Protection	Superguard®
Slip Resistance	DS - R9/R10 (EN 13893 / DIN 51130)
Fire Test	ISO 9239-1
Acoustic Insulation	ΔLw = 8 dB (EN ISO 10140-3)
Classification	Class 23 Domestic Heavy / Class 34 Commercial Very Heavy / Class 43 Industrial Heavy
Warranties	20 Year Residential Warranty / 10 Year Commercial Warranty
Installation	Please contact Gilt Edge Industries for all adhesive and installation instructions. NB: If recommended adhesive is not used, claims will not be accepted. Must be laid in accordance with AS/NZ Installation Standards.

- For samples, range and warranty details please contact us on 0800 377 753 or [www.belgotex.co.nz](http://www.belgotex.co.nz)
- Specifications are based on averages from manufacturing processes and may vary within normal industry tolerances.
- This product is intended for use solely as an indoor floor covering and is not recommended or sold for any other purpose.
- Use entryway systems outside each entrance to prevent dirt, sand, grit and other substances from being tracked onto floor.
- **Rubber Migration:** Rubber migration (also known as Plasticiser Migration) is a condition that can cause vinyl to discolour. It is caused by rubber or latex products, eg rubber or latex-soled slippers, shoes and rubber backed mats, coming into contact with the vinyl over a constant period of time. It is neither a manufacturing nor an installation fault and therefore is not covered by our warranties.

# MATRIX ACOUSTIC



## EUROPEAN OAK



2870



2951

## RIVIERA OAK



1240

# MATRIX ACOUSTIC

## SWEDISH PINE



2242



2965

## TRADITIONAL OAK



1826



1832





# AMTICO FIRST



Construction	Luxury Vinyl Tile
Plank Size	184.2mm x 1219.2mm Various other sizes available indent.
Tile Size	457.2mm x 457.2mm - Ceramic Sable SF3S3593 & Limestone Cool SF3S1561 304.8mm x 609.6mm - Linear Stone Shale SF3S3606 Various other sizes available indent.
Wear Layer Thickness	0.3mm
Total Thickness	2.0mm
Surface Protection	Urethane
Slip Resistance	DS-R10 (DIN 51130 / EN 13893)
Fire Rating	CRF $\geq 11.2\text{kW/m}^2$ (ISO 9239-1)
Classifications	Class 23 Domestic Heavy / Class 31 Commercial Light
Warranties	12 Year Residential Warranty / 7 Year Commercial Warranty
Installation	Please contact Gilt Edge Industries for all adhesive and installation instructions. NB: If recommended adhesive is not used, claims will not be accepted. Must be laid in accordance with AS/NZ Installation Standards.


**A.** Urethane coating.

**B.** High-density wear layer. Gives excellent impact resistance and high clarity, with unique realistic embosses and microbevelled edges on each tile and plank.

**C.** Print layer. Carefully crafted print films create the distinctive Amtico Wood and Stone product designs.

**D.** Core layer. Contains up to 15% recycled pre-consumer content.

**E.** Backing. The foundation of the product which provides long-lasting stability.

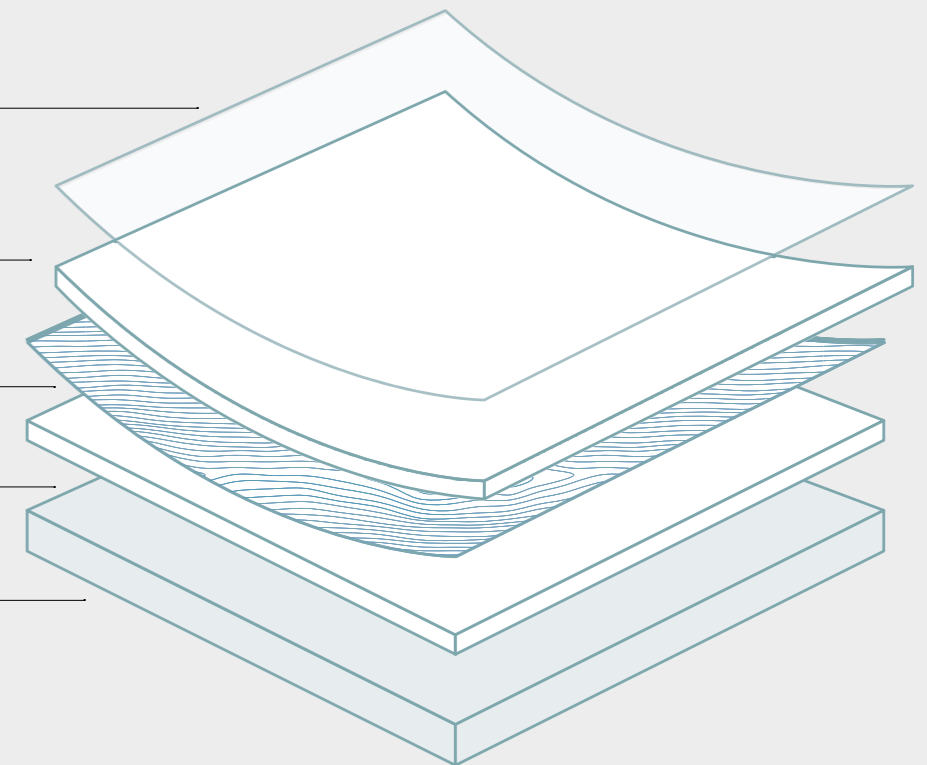

# AMTICO FIRST

## WOODS



Cavalier Oak  
SF3W5024

Celtic Oak  
SF3W2497

Dry Cedar  
SF3W2535

Featured Oak  
SF3W2533

Rustic Limewood  
SF3W2650

# LUXURY VINYL TILES

## WOODS




Sun Bleached Oak  
SF3W2531

Village Oak  
SF3W3022


Weathered Oak  
SF3W2524

White Oak  
SF3W2548

## STONES

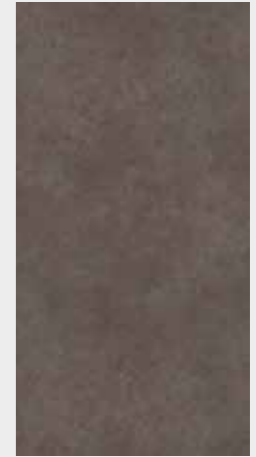

Ceramic Sable  
SF3S3593

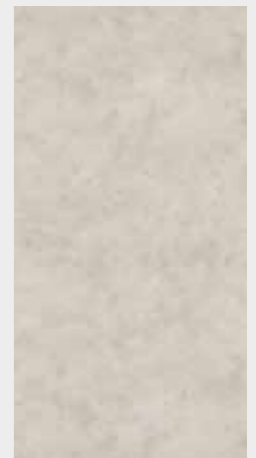

Limestone Cool  
SF3S1561



Linear Stone Shale  
SF3S3606





# AMTICO SPACIA ACOUSTIC



Construction	Luxury Vinyl Tile
Plank / Tile Sizes	184.2mm x 1219.2mm Various other sizes available indent.
Cross Grain Size	457.2mm x 457.2mm - Monument Concrete SS5S3072 & Ceramic Flint SS5S2594 Various other sizes available indent.
Wear Layer Thickness	0.55mm
Total Thickness	3.5mm
Surface Protection	Urethane
Impact Sound Reduction	18dB (EN ISO 717-2)
Classifications	Class 23 Domestic Heavy / Class 33 Commercial Heavy / Class 42 Industrial Medium
Warranties	25 Year Residential Warranty / 10 Year Commercial Warranty
Installation	Please contact Gilt Edge Industries for all adhesive and installation instructions. NB: If recommended adhesive is not used, claims will not be accepted. Must be laid in accordance with AS/NZ Installation Standards.

**A.** Quantum Guard Elite urethane coating. Amtico's superior mark and scuff resistance layer.


**B.** High-density wear layer. Withstands intense use and resists indentation, retaining clarity.

**C.** Print layer. The carefully crafted Wood, Stone and Abstract designs.

**D.** Dual Core layer. Comprising 30% recycled content.

**E.** Backing. Provides a strong foundation and guarantees high performance. Created using 100% recyclable materials.

**F.** Optional Acoustic. (not available on Amtico First). Visco elastic polymer in a closed cell foam structure offering sound reduction of up to 18 dB with a residual indentation of <0.20mm.

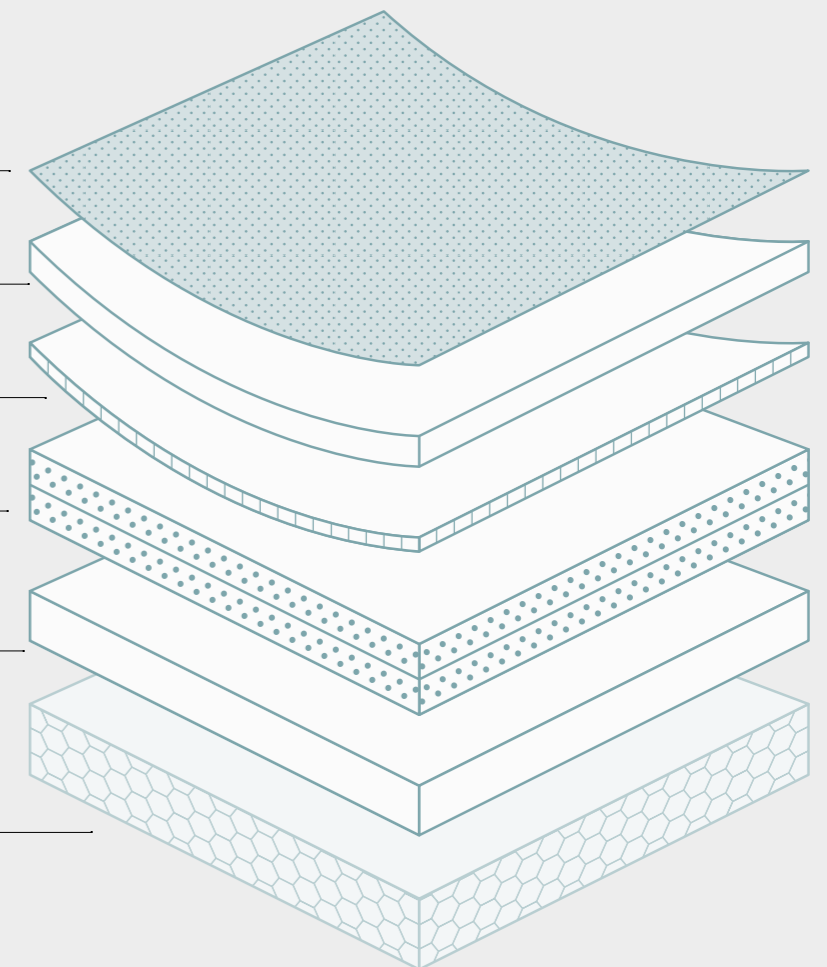

# SPACIA ACOUSTIC

## WOODS



Dusky Walnut  
SS5W2542

Exotic Walnut  
SS5W2541

Featured Oak  
SS5W2533

Traditional Oak  
SS5W2514

White Maple  
SS5W2654

# SPACIA ACOUSTIC

## STONES



Ceramic Flint  
SS5S2594

Monument Concrete  
SS5S3072



Amtico Spacia Acoustic Ceramic Flint SS5S2594





## LVT

### Installation

Dryback is the more traditional type of plank and method of installation. We recommend having your floor installed by a registered and approved New Zealand Installation contractor or dealer. The planks are glued with a special adhesive to a thoroughly prepared surface or subfloor that is hard, dry, and flawless. For full installation instructions visit our website or contact us.

### Care and Maintenance

Good cleaning and maintenance helps to preserve the appearance and extend the life of your floor. Cleaning frequency depends on how intensely the floor is used, how much foot traffic it gets, how dirty it is, what colour, and what type it is. Everyday cleaning can be done with a broom or vacuum cleaner, and then either using a damp microfibre mop or regular mop with a non-aggressive neutral pH cleaner. Belgotex Luxury Vinyl Tiles are given extra protection with the Superguard® layer on top of the resistant wear layer. This layer protects against dirt, stains, scratches, and scuffs, and will make cleaning your floor easier. For full cleaning and maintenance instructions visit our website or contact us.

### Tips

- Always wipe up spillages with a damp cloth before they penetrate into the floor and cause permanent discolouration.
- Follow the detergent manufacturer's instructions with regards to mixing and quantities.
- Use felt pads under hard furniture that is used over the flooring to avoid any scratches or dents in the flooring.



## FREQUENTLY ASKED QUESTIONS

### What is LVT?

Vinyl plank flooring is made of layers of materials pressed together to create hard wearing flooring.

These layers include the protective coating, the wear layer, the design layer, the print layer, glass fibre layers, and the backing. Belgotex LVT includes wood planks in 3 different qualities to suit many different environments.

Our LVT products come either in a dryback or acoustic construction; see the pages on each LVT to show the construction of each product.

### Can I use a steam mop?

We don't recommend that you use a steam mop on any vinyl flooring. The high heat produced will strip the protective wear layer, and cause the product to attract dirt and have a faded appearance.

### Does Belgotex LVT require a lot of maintenance?

No it doesn't. It is low maintenance, and very easy to clean. The Superguard® surface layer means that your floor will resist stains, scratches, and scuffs better than other floors, so you can spend more time enjoying your floor, and less time cleaning it.

### Can I use underfloor heating with Belgotex LVT?

Our products can be installed over underfloor heating, provided it is done professionally. It is also suitable for underfloor cooling if required. See our installation instructions for more information.

### Will LVT be durable?

LVT is the perfect flooring solution for busy family households or commercial environments alike. Our wood look LVT is durable and copes beautifully with the demands of everyday life. Its enhanced surface treatment Superguard® surface treatment offers outstanding slip, scuff, and soiling resistance. It will last the test of time in your space.

### Are Belgotex LVT floors suitable for bathrooms and kitchens?

Yes absolutely. They are hard wearing and moisture resistant, which makes them well suited to most spaces (excluding wet spaces like showers and saunas).

For heavier wearing commercial kitchens, higher slip resistance products may be more suitable – see technical specifications or contact us for more information.

### Can I install Belgotex LVT myself?

Belgotex LVT is very easy to install. However, we advise that you have your floor installed by a registered and approved New Zealand installation contractor or dealer. This should guarantee your happiness with your floor, together with the benefits of the full warranty.

### Where can I purchase Belgotex LVT?

You can purchase Belgotex LVT from many of our registered dealerships nationwide. To find a dealer, visit the 'Find a Retailer' section on our website, or contact us on 0800 377 753.



**Contact Us:**

P. 0800 377 753

F. 0800 377 754

W. [belgotex.co.nz](http://belgotex.co.nz)

**Flooring Design Centres:**

6-10 Akepiro Street, Mt Eden, Auckland

25 Leslie Hills Drive, Riccarton, Christchurch

The colours shown may vary slightly from the actual product and should be used as a guide only.

**Belgotex**<sup>®</sup>