

# Belgotex®

# DIGITAL EVOLUTION



**B.**

A World of Choice

# THE FUTURE STARTS HERE

## **FOREVER DEVELOPING BREAKTHROUGH TECHNOLOGY JUST FOR YOU.**

Our new digital printed vinyl's provide you with endless possibilities in terms of design, which can not be achieved with conventional printing techniques.

With traditional printing techniques you always have a visible repeat in the pattern which can be perceived as artificial, whereas with digital **YOU CAN TRULY IMITATE THE CONTINUOUS PATTERNS** you can obtain with modular floors such as LVT and laminate.

Discover our revolutionary new approaches to design in vinyl floor coverings.





**GRASS**



**MARBLE**




**WATER**





# 3D ABSTRACT

Pattern Repeat – 4000mm x 4000mm

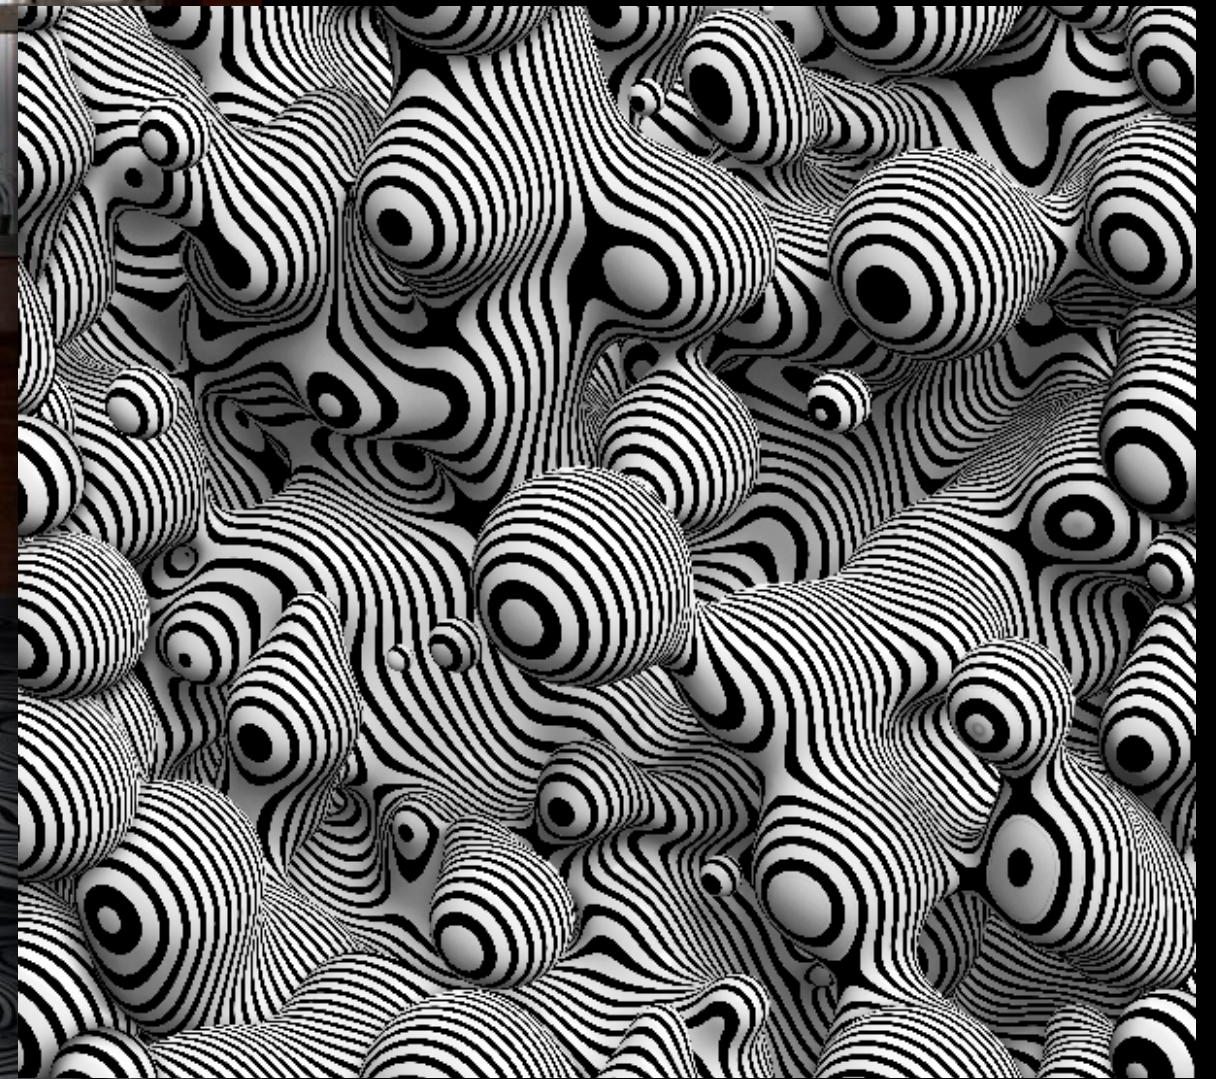






# ABSOLUTE CONCRETE

*Pattern Repeat – 2000mm x 2000mm*

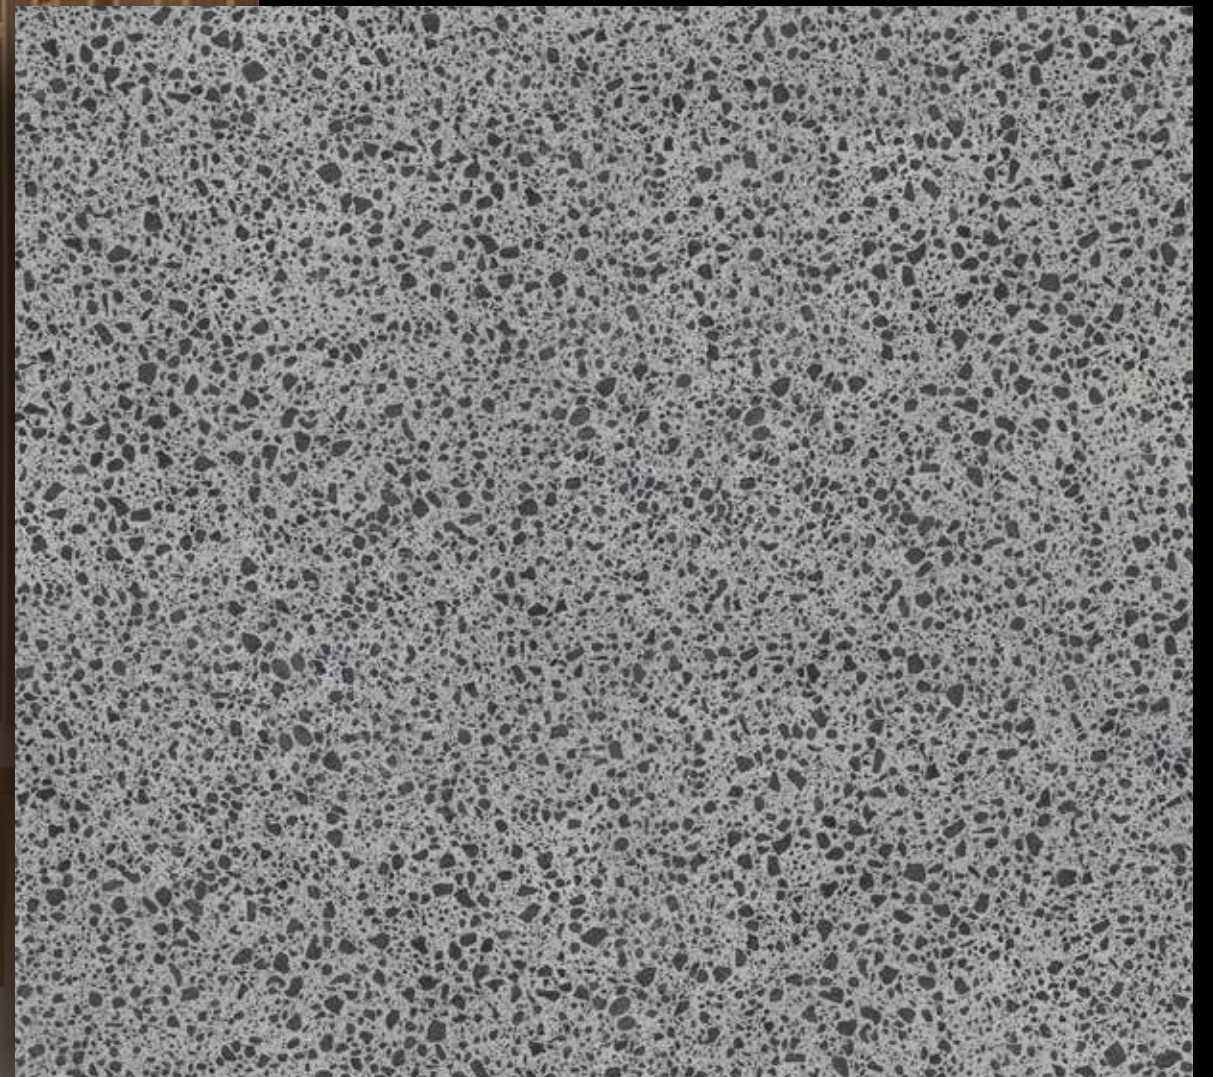





# BLACK STUD

*Pattern Repeat – 500mm x 500mm*








# CHECKER BOARD

*Pattern Repeat – 570mm x 570mm*

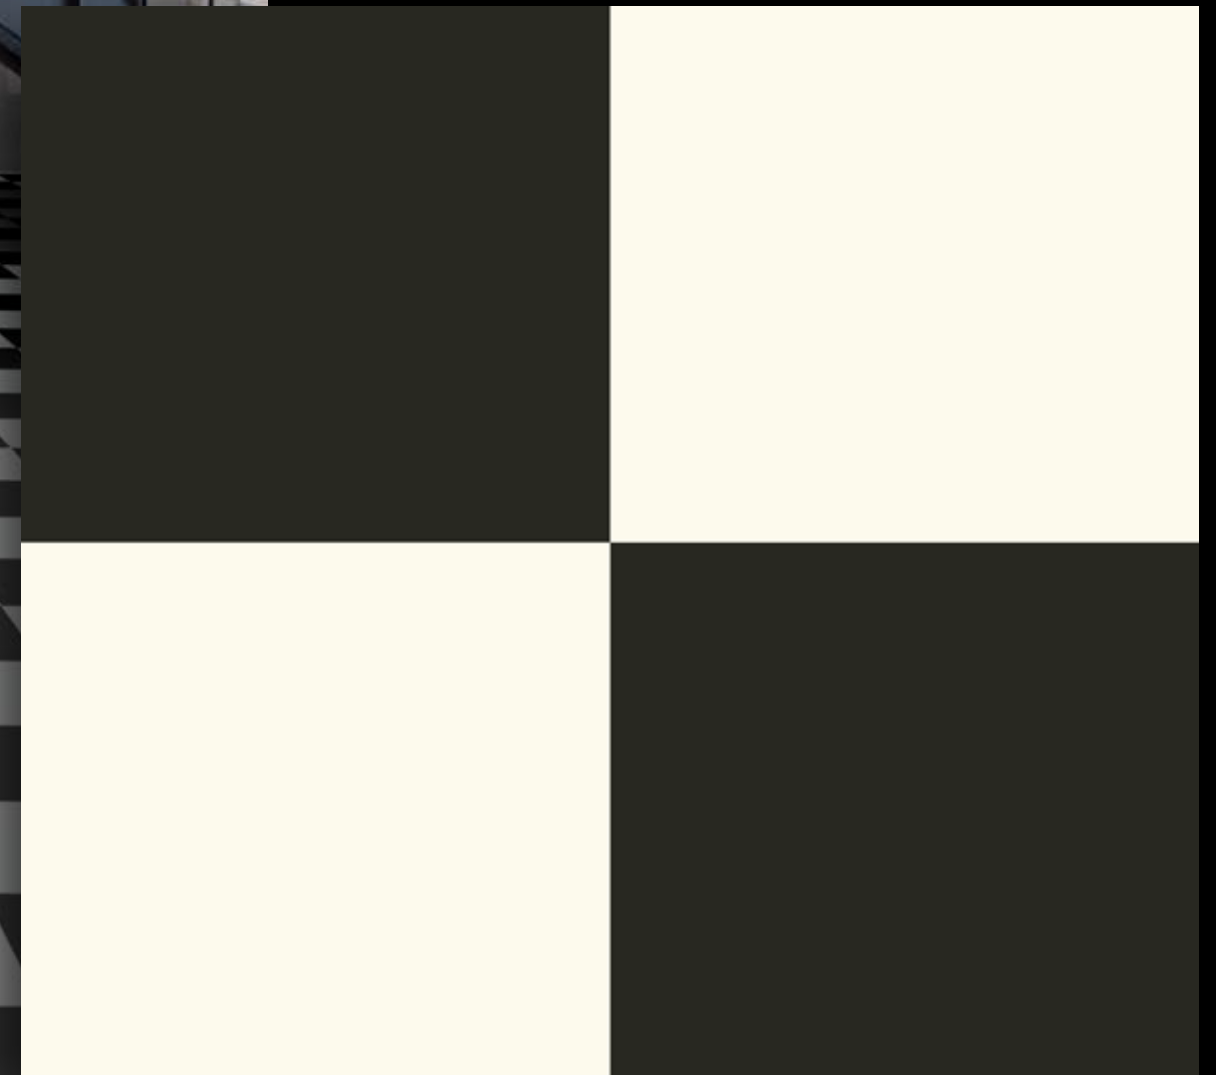





# CORAL REEF

Pattern Repeat – 4000mm x 4000mm







# FLATWEAVE HERRINGBONE

*Pattern Repeat – 500mm x 1000mm*







# GALAXY

*Pattern Repeat – 4000mm x 4000mm*







# GRASS

Pattern Repeat – 2000mm x 2000mm







# JUNGLE

*Pattern Repeat – 2000mm x 2000mm*







# MALTHOUSE BRICK

*Pattern Repeat – 4000mm x 6050mm*








# MARBLE

*Pattern Repeat – 4000mm x 3200mm*

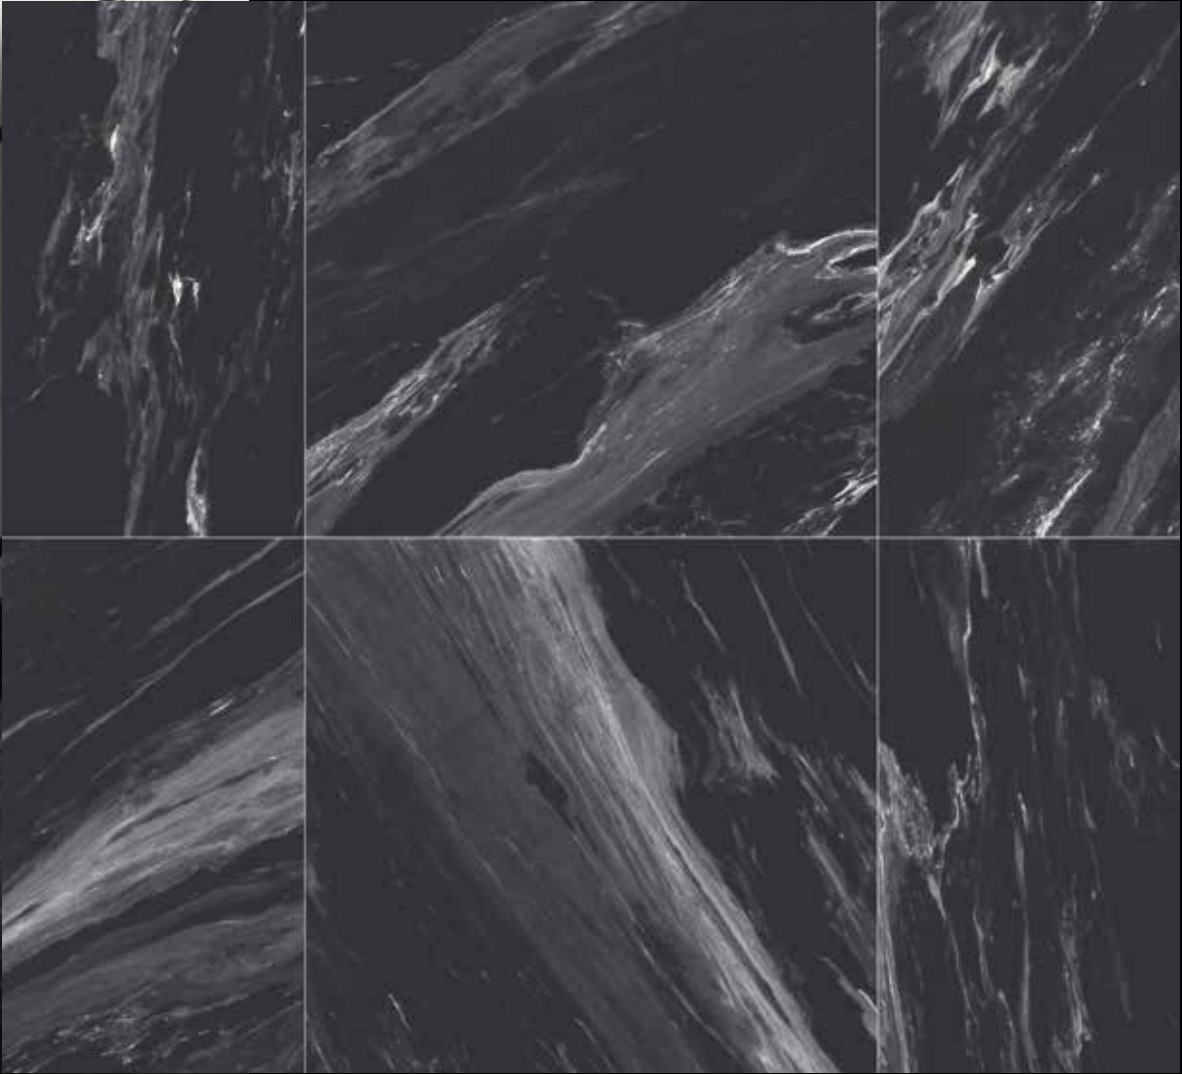





# RIVERSTONE

*Pattern Repeat – 666mm x 1000mm*








# TREADPLATE

*Pattern Repeat – 1000mm x 1000mm*

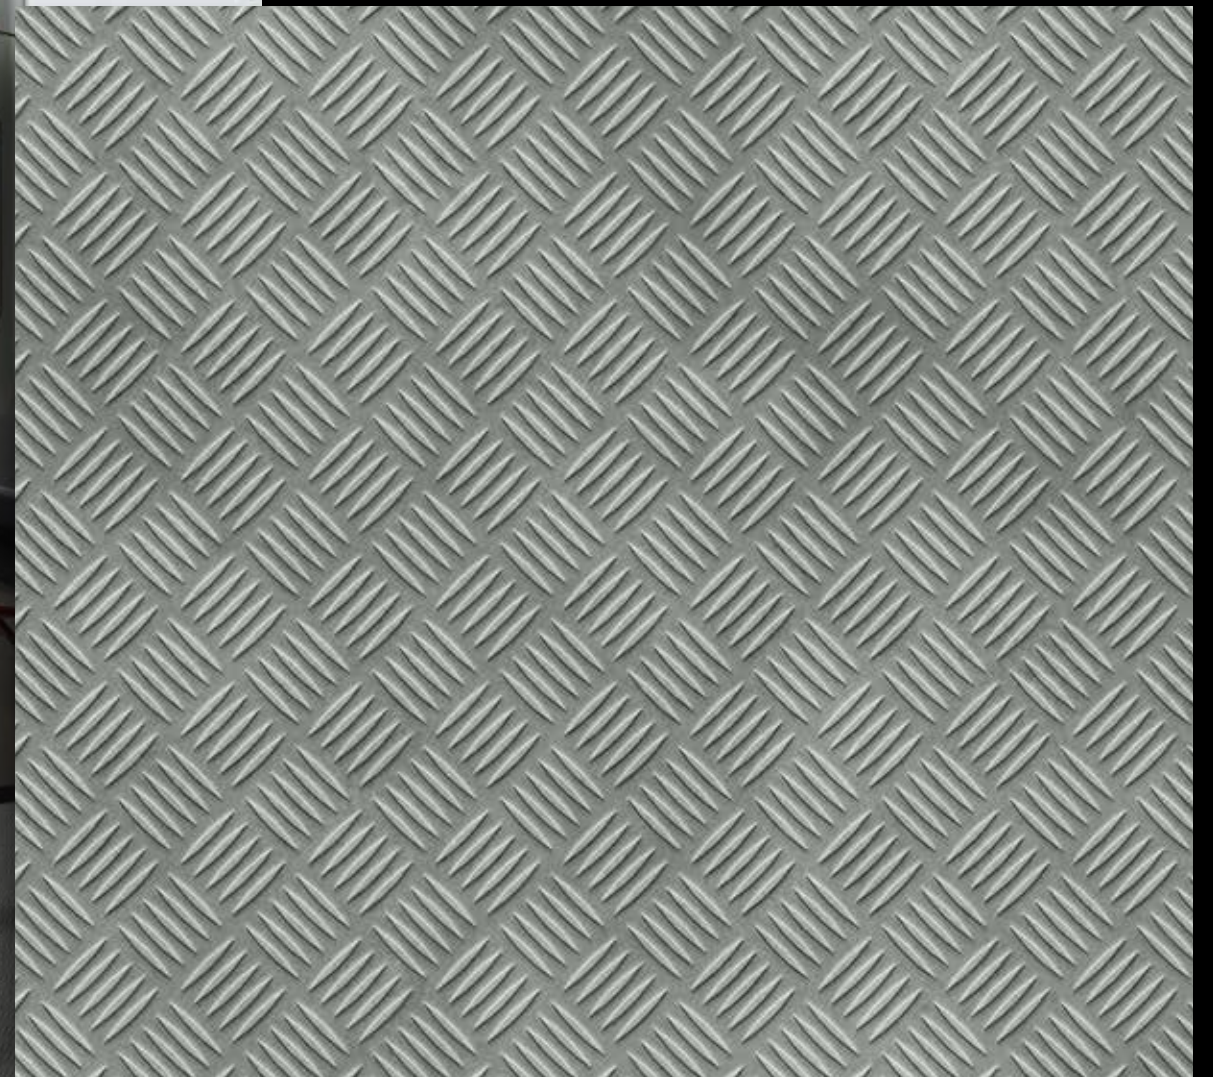





# WATER

*Pattern Repeat – 1500mm x 4000mm*







## TECHNICAL SPECIFICATIONS



Suitable for Underfloor Heating



PU Lacquer Dirt Resistant



Natural Look and Feel



R10 Slip Restraint



100% Phthalate Free



10 Year Commercial Warranty



EMISSIONS DANS L'AIR INTERIEUR A+ A B C

Construction	Heterogeneous Sheet Vinyl
Width	4.0m
Standard Roll Length	±22m
Total Weight	2800g/m <sup>2</sup>
Wearlayer Thickness	0.70mm
Total Thickness	2.0mm
Surface Protection	PU Lacquer
Slip Resistance	R10 (DIN 51130)
Electrical Propensity	<2kV (EN 1815)
Fire Rating	Bfl – s1 (EN 13501)
Acoustic Insulation	ΔLw 6dB (ISO 717/2)
Dynamic Coefficient of Friction	>0.6 (EN 13893)
Wear Group	T (EN 660-2)
Dimensional Stability	≤0.40% (EN ISO 23999, EN 434)
Curling	≤8mm (EN ISO 23999)
Thermal Resistance	0.014m <sup>2</sup> K/w (ISO 8302)
Thermal Insulation	0.14W/m/K (EN 12524)
Residual Indentation	≤0.20mm (EN ISO 24343-1, EN 433)
Indoor Air Quality	FloorScore®, A+ Emissions
Chemical Resistance	Resistant (EN ISO 26987, EN 423)
Light Fastness	≥6 (EN ISO 105B02)
Underfloor Heating	Suitable
Classifications	Class 23 Commercial Very Heavy / Class 43 Industrial Heavy
Warranties	10 Year Commercial Warranty
Environmental	100% Phthalate Free, ISO 14001, ISO 9001

**Installation** Please contact Gilt Edge Industries for all adhesive and installation instructions.  
 NB: If recommended adhesive is not used, claims will not be accepted. Must be laid in accordance with AS/NZ Installation Standards.





**Contact Us:**

P. 0800 377 753

F. 0800 377 754

W. [belgotex.co.nz](http://belgotex.co.nz)



[belgotexNZ](https://www.facebook.com/belgotexNZ)



[belgotex\\_nz](https://www.instagram.com/belgotex_nz)



[belgotex\\_NZ](https://www.pinterest.com/belgotex_NZ)

The colours shown may vary slightly from the actual product and should be used as a guide only.

**Belgotex®**