



## DECOPRINT 2 OR 1 MM



### ▶ PROTECTION OR DECORATION PANEL WITH CUSTOMIZED DIGITAL PRINTING

#### Applications

The Decoprint printed panel is the original solution created and developed by SPM to combine customized wall protection (2 mm) and/or decoration (1 mm).

We custom-build your protection and/or decoration panel, using digital printing to place your image (photograph, drawing, logo, text, etc.) on the back of the panel, in the requested size.

It is also possible to link images to provide a continuous image. In 2 mm thick, this is the ideal protection to enhance a touch of elegance and originality in buildings looking for aesthetic or signage solutions to cover walls in form.

The 2 mm Decoprint panel creates a welcoming environment while guaranteeing durable and optimal protection and meets the hygiene and impact resistance requirements necessary in buildings that are open to the public.

#### Description


- Model: Decoprint protection (2 mm) or decoration (1 mm) panel with customized digital printing
- Height: made-to-measure (maximum 1.20 m)
- Width: made-to-measure (maximum 2.90 m)
- Thicknesses: 2 mm or 1 mm
- Material: Translucent antibacterial and Bs2d0 fire-rated PVC with image printed on the back
- Surface finish: slightly textured ("Optimixt" grain\* in 2 mm or "Velvet" grain in 1 mm)
- Fixing: adhesive bonding with SPM acrylic glue or SPM universal mastic glue. Joints between panels can be made using silicone joints or PVC welding rods, colour matched to the range.
- Colours: translucent for customization.

*\*\*"Optimixt" grain: optimal combination of scratch resistance, hygiene and aesthetic.*



#### Specification

- Description: protection (2 mm) or decoration (1 mm) panel with customized digital printing (Decoprint as manufactured by SPM) from translucent antibacterial PVC achieving Bs2d0 fire rating with images printed on the back. The surface is slightly textured ("Optimixt" grain in 2 mm or "Velvet" grain in 1 mm as manufactured by SPM). Its maximum height is 1.20 m and its maximum length is 2.90 m and 2 mm thick (protection) or 1 mm thick (decoration).
- Environment: no heavy metals and no substance potentially subjected to any REACH restriction are used in its manufacture, nor PBT/BPA. The calcium-zinc thermal stabilisation process is used. The emission level of volatile substance in inside air has been tested according to ISO 16000-6 and is very low (A+) according to the French regulation (23 March 2011 nr 2011-321 Decree and 19 April 2011 Order). 100% of the product are recyclable.
- Colours: customized and selected by architects\*\*
- Installation: glue as per manufacturer's instructions.

*\*\*The reproduced images or photos, provided by the user in accordance with SPM requested specification, must be free of copyright – if they are not, the reproduction rights are payable by the user, who has full responsibility.*

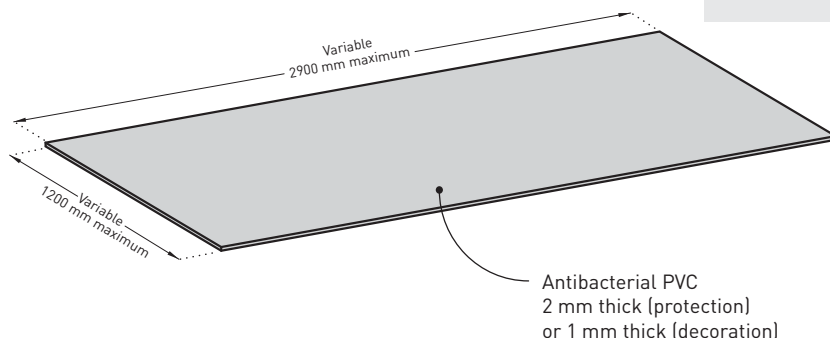

▶ SPM CARRIES OUT YOUR CUSTOMIZED PANEL

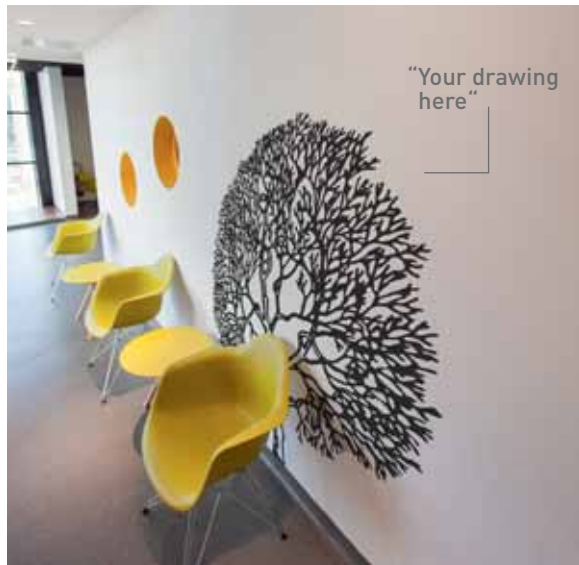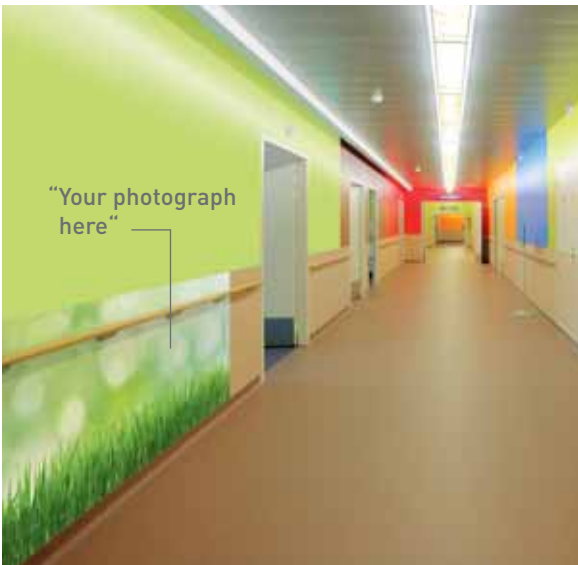

Call our local service for answers to all your questions and to create a customized panel.

*The reproduced images or photos, provided by the user in accordance with SPM requested specification, must be free of copyright – if they are not, the reproduction rights are payable by the user, who has full responsibility.*