

RIGID LUXURY FLOATING FLOORS

B_




WHO ARE WE?

Belgotex has 30 years proven experience in the New Zealand flooring market. We stand by our products, and pride ourselves on the innovation and quality that we bring to the market every day.

Coventry Technical	Specification
Covena y rechined	
Stain Resistant Antistatic Environmentally	Castor Chair DS Suitable For
Stain Resistant Antistatic Environmentally Responsible	Castor Chair DS Suitable For Compatible Slip Resistance Stairs
Construction	Luxury Floating Flooring, Rigidcore
Plank Size	222.25mm x 1517.65mm
Tiles per Carton	6pcs / 2.02m ²
Total Weight	10148g/m²
Wearlayer Thickness	0.55mm
Total Thickness	6.5mm (5mm + 1.5mm Acoustic Backing)
Slip Resistance	DS R10 (EN 13893)
Fire Rating	CRF 8.8kW/m ² (ISO 9239-1)
Dimensional Stability	0.08% (ISO 23999:2008)
Acoustic Properties	BCA Approved for High Rise Buildings
Residual Indentation	≤0.7% (ASTM F1914-11)
Colour Fastness	≥4 (EN 20 105 - A02)
Formaldehyde Group	E1 (EN 717-1)
Resistance to Staining	Excellent (EN 423)
Abrasion Resistance	Group T (EN 660)
Classification	Heavy Duty Residential / Heavy Duty Commercial
Acoustic Rating	IIC 57
Stair Rating	Suitable
Warranty	20 Year Residential Warranty / 10 Year Commercial Warranty
Environmental	ISO 14001
Installation	Please contact Gilt Edge Industries for all adhesive and installation instructions. NB: If recommended adhesive is not used, claims will not be accepted. Must be laid in accordance with AS/NZ Installation Standards.

WHY COVENTRY LUXURY FLOATING FLOORS?

A floating floor is a floor that does not need to be nailed or glued to the subfloor. The term floating floor refers to the installation method. Floating floors are not one specific type of material, but this phrase describes the way that a flooring material sits on top of the subfloor. A floating floor means the product "floats" on top of the subfloor and is not attached or adhered to it in any way.

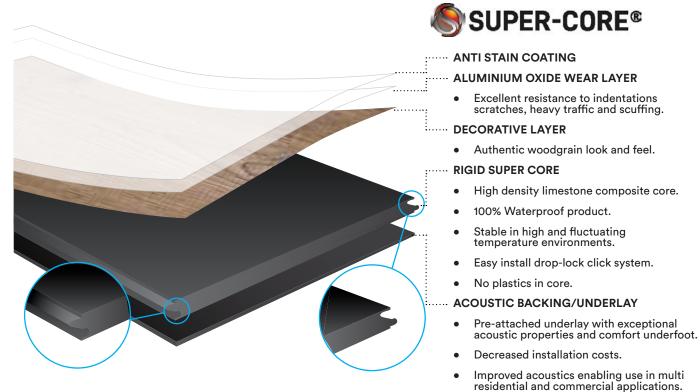

residential and commercial

PRODUCT FEATURES:

- 100% Waterproof.
- Planks are 6.5mm thick, providing soft cushioning underfoot.
- Extreamly durable and hard wearing.
- Impact and indentation resistant.
- Stain and scratch resistant.
- Quick and easy to install.
- Low maintenance.
- Natural looking and versatile.
- Can be installed in kitchens, bathrooms and laundries.
- Drop lock click system enables quick and easy installation.
- No underlay required.
- Solid core provides minimum expansion and contraction.
- No expansion joins required for rooms up to 15×30m.







Blonde Oak



Burnt Oak



Cool Oak







Golden Oak


Natural Oak

Washed Oak







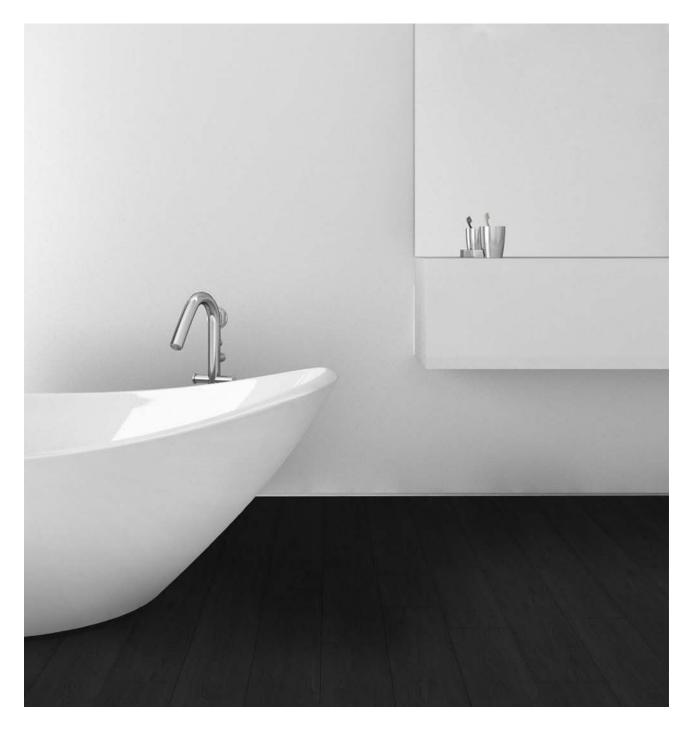













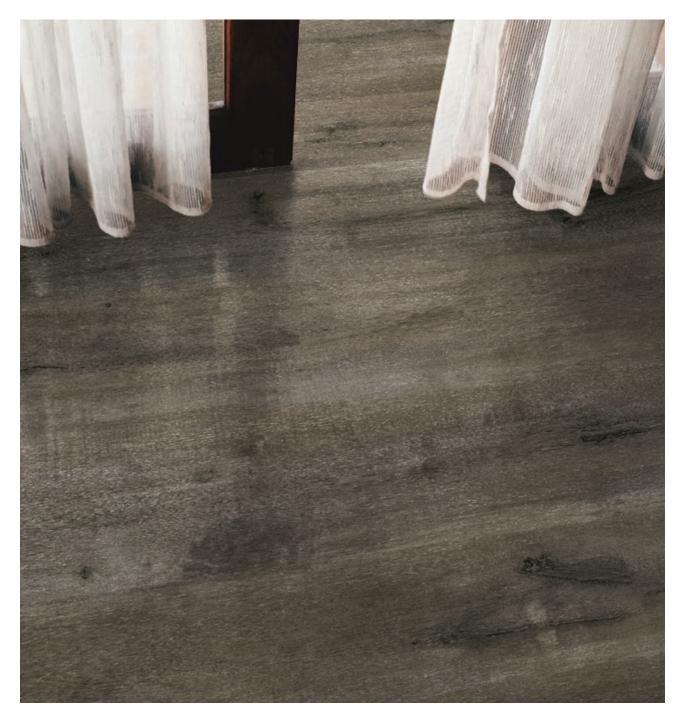






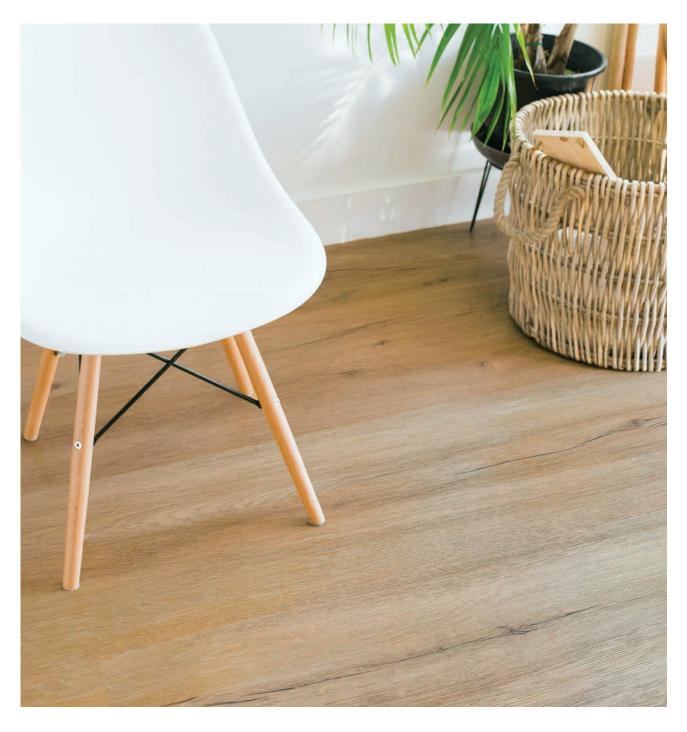

GOLDEN OAK



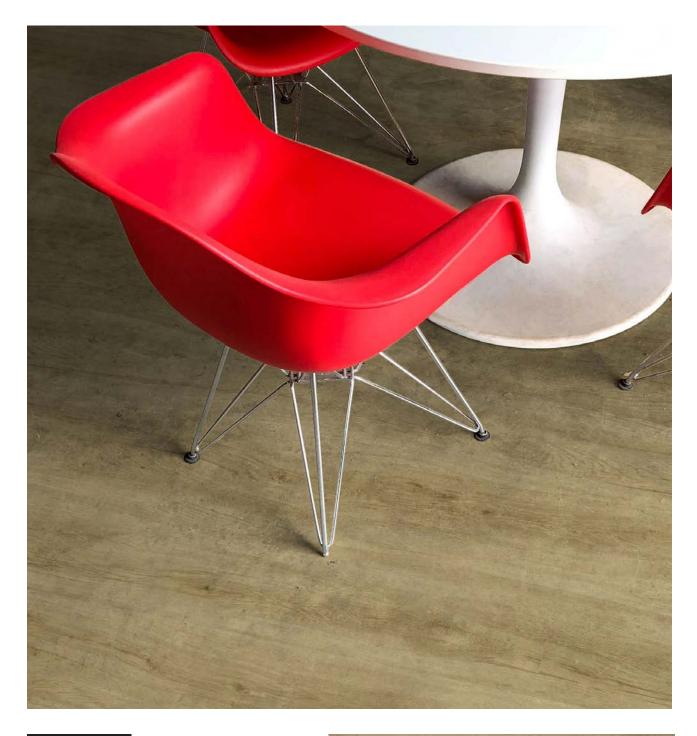

NATURAL OAK









MAINTENANCE GUIDE



Appropriate cleaning and maintenance relevant to the level of use will help the look of your Belgotex Coventry floor remain at the same quality level over a long period of time.

Preventative Measures

The use of doormats at all entrance points is highly recommended to reduce the amount of grit and abrasive particles from shoes.

The use of wide-based plastic furniture protectors is also highly recommended to prevent scratching and indentation from furniture legs. Never drag the furniture. Place vinyl chair mats under any office chairs or castor wheels that may be used.

Avoid hard plastic wheels of any type on your floor. Regular cleaning and the timely removal of abrasive dirt and stains greatly reduces the amount of cleaning required and prolongs the appearance and life of your floor.

Never wet mop the floor or allow pools of water to sit for any length of time. Do not allow water to stand on the joints for long periods of time either. Do not steam clean or steam mop your floor.

Vacuum cleaning and sweeping are helpful for removing dust and dirt prior to mopping, cleaning up accidents and for places where the mop can't reach. Avoid using waxes and polishes which leave residues attracting more dirt.

Mop up any spillages and treat stains immediately using an appropriate cleaning solution.

Regular Cleaning

Dry sweep or vacuum the floor weekly or more often, depending on the amount of dirt and foot traffic.

The floor may be damp mopped if required. Use a clean mop, warm water and a neutral pH detergent; Wring out the mop as dry as possible.

General Instructions

Chemicals of all kinds such as solvents, medicinal drugs and disinfection agents, hair dye, tea, fats, pencil or marker ink etc, can permanently stain the floorings.

Direct contact of the floorings with material made of dyed rubber, such as dirt absorbing mats or rubber caps on devices, chair or table legs, can permanently stain the floorings. Contact points should therefore be protected. This should also be done with products made of terracotta. Direct sunlight as well as intensive artificial light may cause discolouration of all floorings.





Contact Us:

P. 0800 377 753F. 0800 377 754W. belgotex.co.nz

Flooring Design Centres:

6-10 Akepiro Street, Mt Eden, Auckland 25 Leslie Hills Drive, Riccarton, Christchurch

The colours shown may vary slightly from the actual product and should be used as a guide only.

Belgotex[•]