

# B.

# Amtico

NEW ZEALAND STOCKED DESIGNS / SPECIAL ORDER LAYING PATTERNS



British  
Excellence

# amtico

# Belgotex®

# Amtico has been a pioneer of Luxury Vinyl Tile flooring for more than 50 years, with a reputation built on collaborative creativity, enduring performance and unrivalled expertise.

Amtico First and Spacia Acoustic are sophisticated collections with a combination of style and function that makes them beautifully versatile for residential and commercial projects. Easy to work with, specify, lay and maintain plus integrating flawlessly with other materials and designs.

Amtico's LVT products use the industry's most technically advanced layering system with world-leading Multiple Performance System giving underfoot comfort and high resistance to wear, resulting in unrivalled durability and a long lasting appearance.

Manufactured with consideration for both the built and natural environment, Amtico First and Spacia Acoustic are certified for meeting VOC requirements for well-being and air quality. Materials created during the production process are fully recycled, with some going back into other products and the remainder used by external businesses to make new products.



## View the Collection

What you see here is only the New Zealand stocked selection plus some information on Amtico Signature Laying Patterns (special order). To see the full range of what Amtico has to offer visit our website. [www.belgotex.co.nz/products/vinyl/amtico](http://www.belgotex.co.nz/products/vinyl/amtico).





First – Sun Bleached Oak SF3W2531



---

# AMTICO FIRST




IN STOCK  
NOW

Practical design solutions to suit all lifestyles, First is a collection honed to meet the challenges of residential and light commercial projects with outstanding value for money. Amtico makes it possible.

# LOW EMISSION, DURABLE CONSTRUCTION

Amtico First uses the industry's most technically advanced layering system. Our world-leading Multiple Performance System gives underfoot comfort and high resistance to wear, resulting in unrivalled durability and a long-lasting appearance.

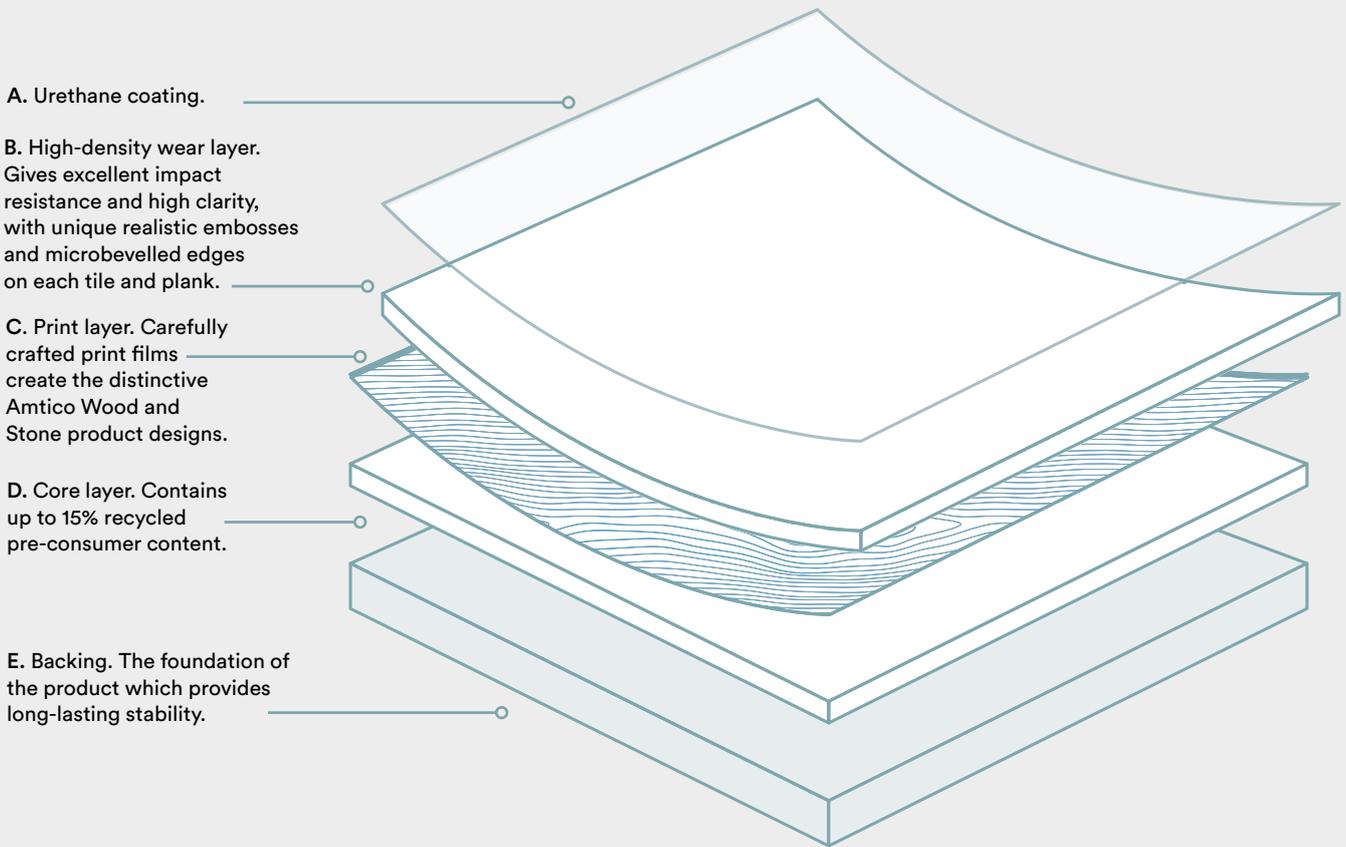

PHTHALATE FREE



A LOW EMISSION PRODUCT




MADE WITH RECYCLED CONTENT



100% RECYCLABLE

# AMTICO FIRST

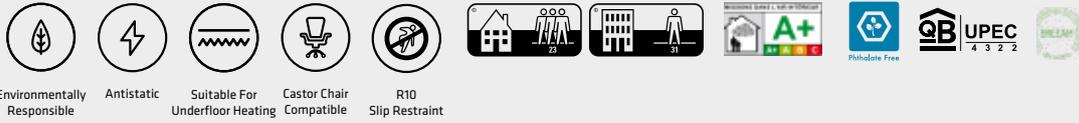

<b>Construction</b>	Luxury Vinyl Tile
<b>Plank Size</b>	184.2mm x 1219.2mm Various other sizes available indent.
<b>Tile Size</b>	457.2mm x 457.2mm - Ceramic Sable SF3S3593 & Limestone Cool SF3S1561 304.8mm x 609.6mm - Linear Stone Shale SF3S3606 Various other sizes available indent.
<b>Weight</b>	3675g/m <sup>2</sup>
<b>Wear Layer Thickness</b>	0.3mm
<b>Total Thickness</b>	2.0mm
<b>Surface Protection</b>	Urethane
<b>Slip Resistance</b>	DS-R10 (DIN 51130 / EN 13893)
<b>Fire Rating</b>	CRF ≥11.2kW/m <sup>2</sup> (ISO 9239-1)
<b>Impact Sound Reduction</b>	3dB (EN ISO 717-2)
<b>Residual Indentation</b>	≤0.1mm (ISO 24343-1 / EN 433)
<b>Dimensional Stability</b>	≤0.25% (ISO 23999 / EN 434)
<b>Thermal Insulation</b>	0.010m <sup>2</sup> K/W (EN 12664)
<b>Underfloor Heating</b>	Suitable
<b>Curling</b>	≤2mm (ISO 23999 / EN 434)
<b>Light Stability</b>	≥6 (ISO 105 B02)
<b>Resistance to Chemicals</b>	Excellent (EN ISO 26987 / EN 423)
<b>Classifications</b>	Class 23 Domestic Heavy / Class 31 Commercial Light
<b>Warranties</b>	12 Years Residential Warranty / 7 Years Commercial Warranty
<b>Environmental</b>	ISO 14001, A/A+ rating (BRE Green Guide) Manufactured using phthalate free and bio based plasticisers except for recycled content. QB UPEC certified (UPEC 326-001.1) BREEAM certified (ENP 468)
<b>Installation</b>	Please contact Gilt Edge Industries for all adhesive and installation instructions. NB: If recommended adhesive is not used, claims will not be accepted. Must be laid in accordance with AS/NZ Installation Standards.



# AMTICO FIRST

Wood Collection



Cavalier Oak  
SF3W5024



Celtic Oak  
SF3W2497



Dry Cedar  
SF3W2535



Featured Oak  
SF3W2533



Rustic Limewood  
SF3W2650

Plank Size: 184.2mm x 1219.2mm



# AMTICO FIRST

Wood Collection



Sun Bleached  
Oak SF3W2531



Village Oak  
SF3W3022



Weathered Oak  
SF3W2524



White Oak  
SF3W2548

Plank Size: 184.2mm x 1219.2mm



First – Limestone Cool SF3S1561

# AMTICO FIRST

Stone Collection



First – Ceramic Sable SF3S3593



Limestone Cool SF3S1561  
Tile size: 457.2 x 457.2mm



Ceramic Sable SF3S3593  
Tile size: 457.2 x 457.2mm



Linear Stone Shale SF3S3606  
Tile size: 304.8 x 609.6mm





---

# SPACIA ACOUSTIC




**IN STOCK  
NOW**

**All of Amtico's outstanding design focused into a hard-working, streamlined collection for residential and commercial projects. Spacia Acoustic combines aesthetics and sound transmission resistance with its specially developed acoustic backing dampening noise by up to 18dB, whilst also providing outstanding comfort.**

# UNRIVALLED PERFORMANCE AND DURABILITY

The crowning feature of our Multiple Performance System is our Quantum Guard Elite urethane layer. Amtico's Quantum Guard Elite is the most durable urethane on the market. The low gloss finish also enhances the realism of our natural-looking products. Quantum Guard Elite eliminates the need for polish, enhances durability and is easy to clean. It improves appearance retention and offers high-slip retardance.

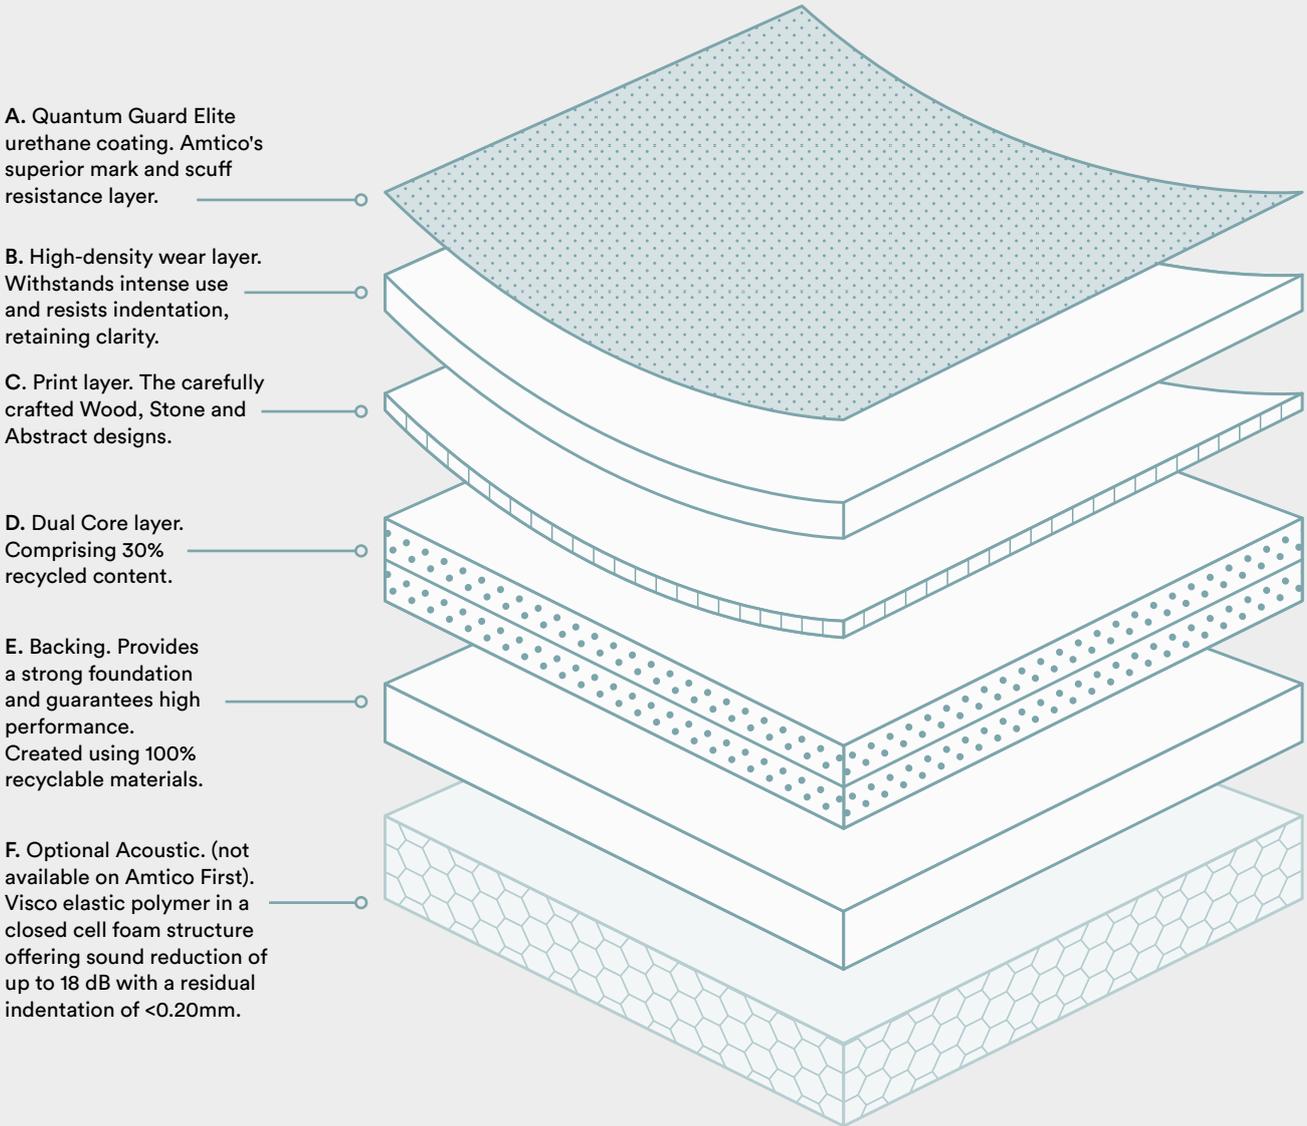

PHTHALATE FREE



A LOW EMISSION PRODUCT



MADE WITH RECYCLED CONTENT



100% RECYCLABLE

# SPACIA ACOUSTIC



Environmentally Responsible



Antistatic



Suitable For Underfloor Heating



Castor Chair Compatible



R10 Slip Restraint



Construction	Luxury Vinyl Tile
Plank / Tile Sizes	184.2mm x 1219.2mm Various other sizes available indent.
Cross Grain Size	457.2mm x 457.2mm - Monument Concrete SS5S3072 & Ceramic Flint SS5S2594 Various other sizes available indent.
Weight	3600g/m <sup>2</sup>
Wear Layer Thickness	0.55mm
Total Thickness	3.5mm
Surface Protection	Urethane
Slip Resistance	DS-R10 (DIN 51130 / EN 13893)
Electrical Propensity	≤2kV (EN 1815)
Fire Rating	CRF 9.8kW/m <sup>2</sup> (ISO 9239-1)
Impact Sound Reduction	18dB (EN ISO 717-2)
Residual Indentation	≤0.2mm (ISO 24343-1 / EN 433)
Dimensional Stability	≤0.25% (ISO 23999 / EN 434)
Thermal Insulation	0.032m <sup>2</sup> K/W (EN 12664)
Underfloor Heating	Suitable
Curling	Pass (ISO 23999 / EN 434)
Light Stability	7 or better (ISO 105 B02)
Resistance to Chemicals	Excellent (EN ISO 26987 / EN 423)
Classifications	Class 23 Domestic Heavy / Class 33 Commercial Heavy / Class 42 Industrial Medium
Warranties	25 Year Residential Warranty / 10 Year Commercial Warranty
Environmental	ISO 14001, A/A+ rating (BRE Green Guide) Manufactured using phthalate free and bio based plasticisers except for recycled content. QB UPEC certified (UPEC 326-001.1) BREEAM certified (ENP 468)
Installation	Please contact Gilt Edge Industries for all adhesive and installation instructions. NB: If recommended adhesive is not used, claims will not be accepted. Must be laid in accordance with AS/NZ Installation Standards.

# SPACIA ACOUSTIC

Wood Collection



Dusky Walnut  
SS5W2542



Exotic Walnut  
SS5W2541



Featured Oak  
SS5W2533



Traditional Oak  
SS5W2514



White Maple  
SS5W2654

Plank Size: 184.2mm x 1219.2mm



# SPACIA ACOUSTIC

Stone Collection



Monument Concrete SS5S3072



Century Concrete  
SS53069



Ceramic Flint  
SS5S2594



Monument Concrete  
SS5S3072



Sift Stone Canvas  
SS5S6133

Tile Size: 152.4mm x 914.4mm





---

# AMTICO SIGNATURE LAYING PATTERNS



**SPECIAL  
ORDER**


**Our laying patterns are a foundation for creativity, a framework to experiment with shapes and tile sizes to produce extraordinary floors. A highly realistic finish with a robust construction, guaranteed quality and technical excellence of an enduring British brand.**

# SIGNATURE



Construction	Luxury Vinyl Tile
Plank / Tile Sizes	Various sizes available
Cross Grain Size	457.2 & 914.4mm in length
Weight	3130g/m <sup>2</sup>
Wear Layer Thickness	1.0mm
Total Thickness	2.5mm
Surface Protection	Urethane
Slip Resistance	DS-R10 (DIN 51130 / EN 13893)
Electrical Propensity	≤2kV (ISO 6356 / EN 1815)
Fire Rating	CRF 10.0kW/m <sup>2</sup> (ISO 9239-1)
Impact Sound Reduction	4dB (EN ISO 717-2)
Residual Indentation	≤0.1mm (ISO 24343-1 / EN 433)
Dimensional Stability	≤0.25% (ISO 23999 / EN 434)
Thermal Insulation	0.021m <sup>2</sup> K/W (EN 12664)
Underfloor Heating	Suitable
Curling	≤2mm (ISO 23999 / EN 434)
Light Stability	≥7 (ISO 105 B02)
Resistance to Chemicals	Excellent (EN ISO 26987 / EN 423)
Classifications	Class 23 Domestic Heavy / Class 34 Commercial Very Heavy / Class 43 Industrial Heavy
Warranties	Lifetime Residential Warranty / 20 Year Commercial Warranty
Environmental	ISO 14001, A/A+ rating (BRE Green Guide) Manufactured using phthalate free and bio based plasticisers except for recycled content. QB UPEC certified (UPEC 326-001.1) BREEAM certified (ENP 468)
Installation	Please contact Gilt Edge Industries for all adhesive and installation instructions. NB: If recommended adhesive is not used, claims will not be accepted. Must be laid in accordance with AS/NZ Installation Standards.

# SIGNATURE – ARROW

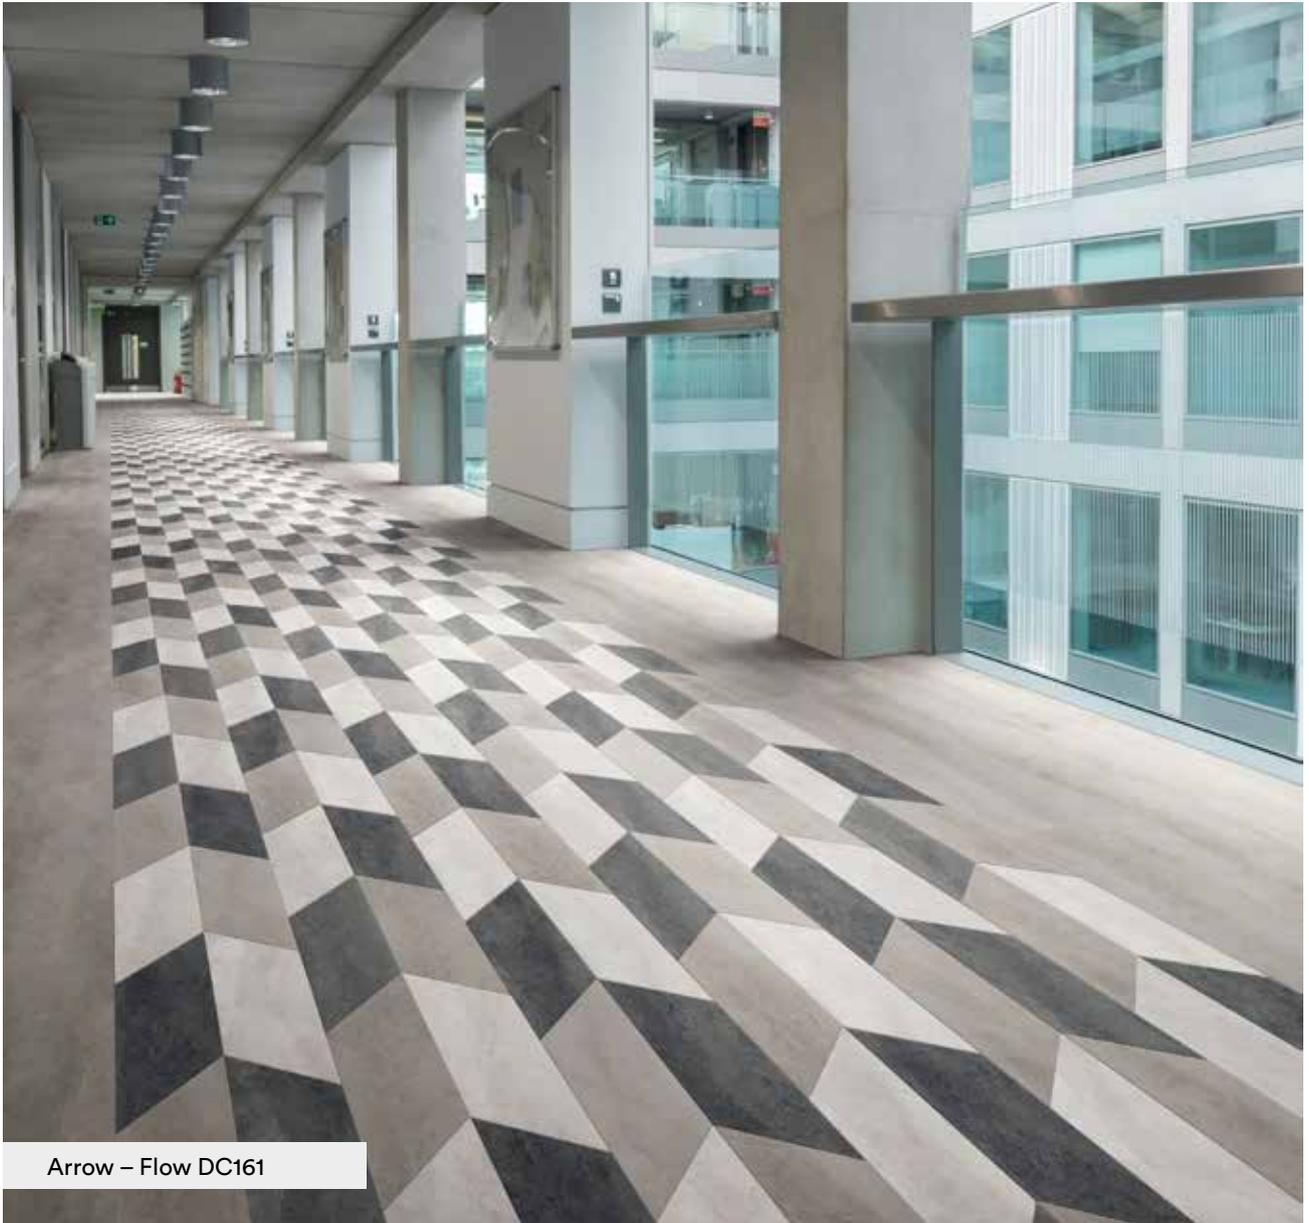

Arrow – Flow DC161

Available using 1 or 2 products.



Flow DC161



Temple DC160



Turner DC163



Twilight DC162

# SIGNATURE – BASKET WEAVE




Available using 1, 2 or 4 products.



Accord DC105



Legend DC106



Raven DC103



Vintage DC102

# SIGNATURE – BLOCK PARQUET



Available using 1 product with or without stripping



Atelier DC409



Linseed DC413




Sable DC410



Studio DC411

# SIGNATURE – EDGE

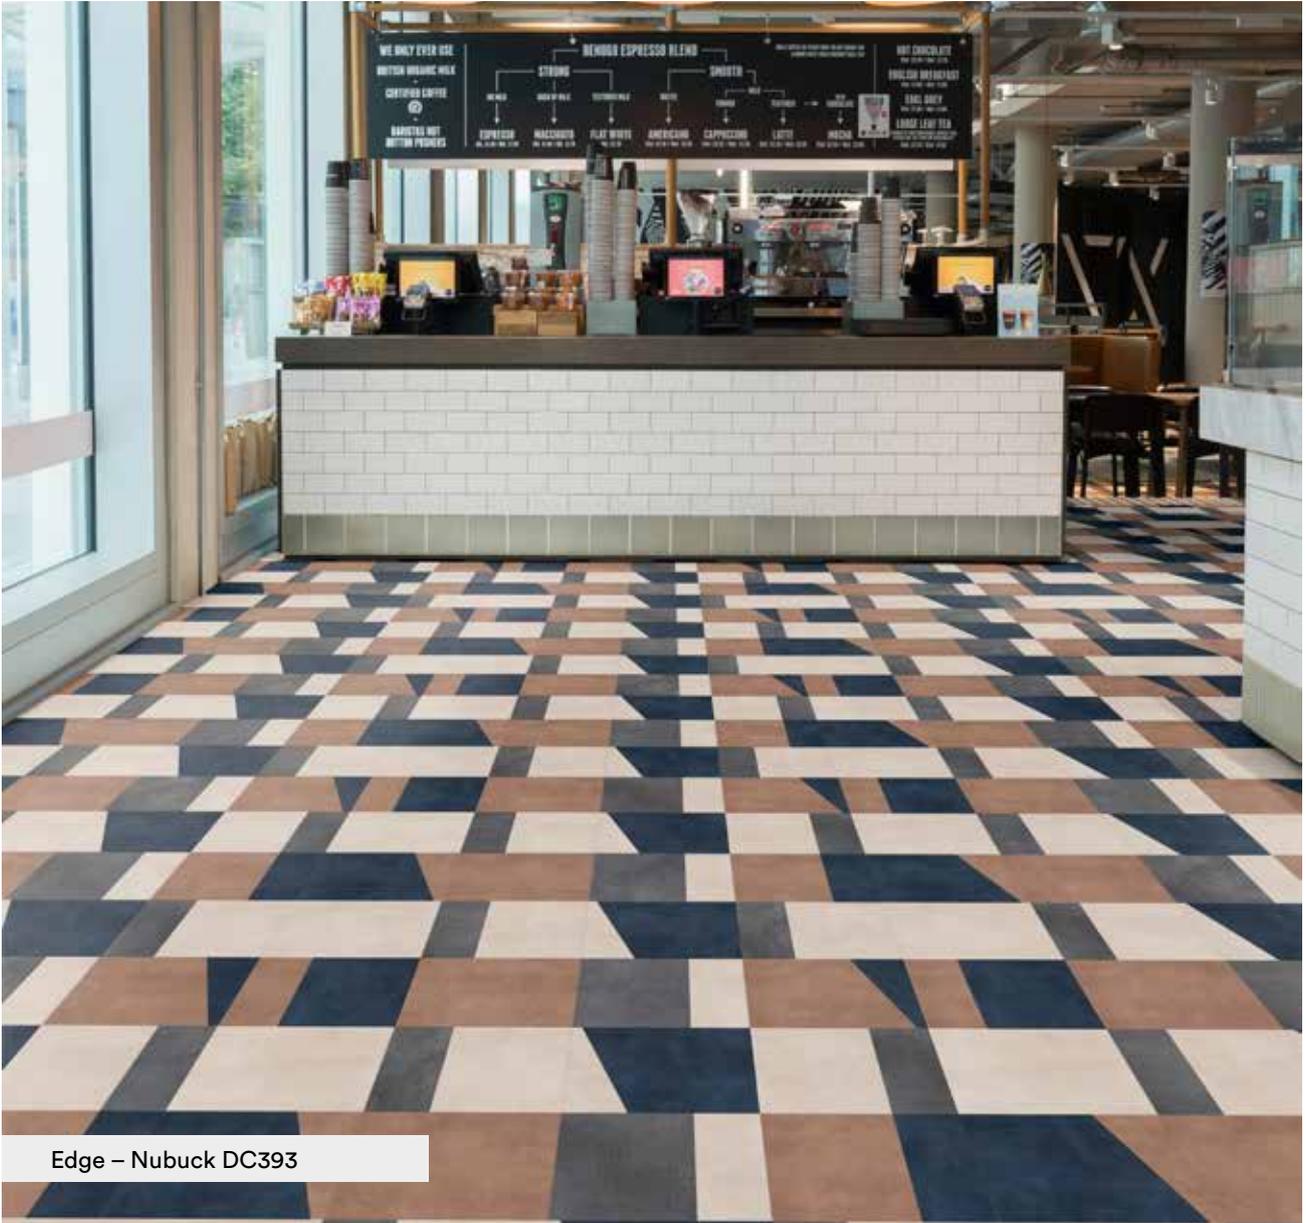


Available using 1 product with or without stripping



Marina DC395



Nubuck DC393



Pier DC396



Tower DC392

# SIGNATURE – FLAGSTONE



Available using 1 product with stripping.



Concerto DC3518



Muse DC350



Palladium DC349

# SIGNATURE – FUSION PARQUET



Available using 2 or 3 products.



Adagio DC388



Allegro DC390



Staccato DC389


# SIGNATURE – HALCYON PLEAT




Available using 1 or 4 products.



Alder DC421



Cypress DC426



Myrtle DC424



Willow DC422

# SIGNATURE – PARQUET



Parquet – Mystery DC107

Available using 1, 2 or 3 products.



Deam DC336



Gardenia DC336




Mystery DC107



Oslo DC110

# SIGNATURE – PASSO

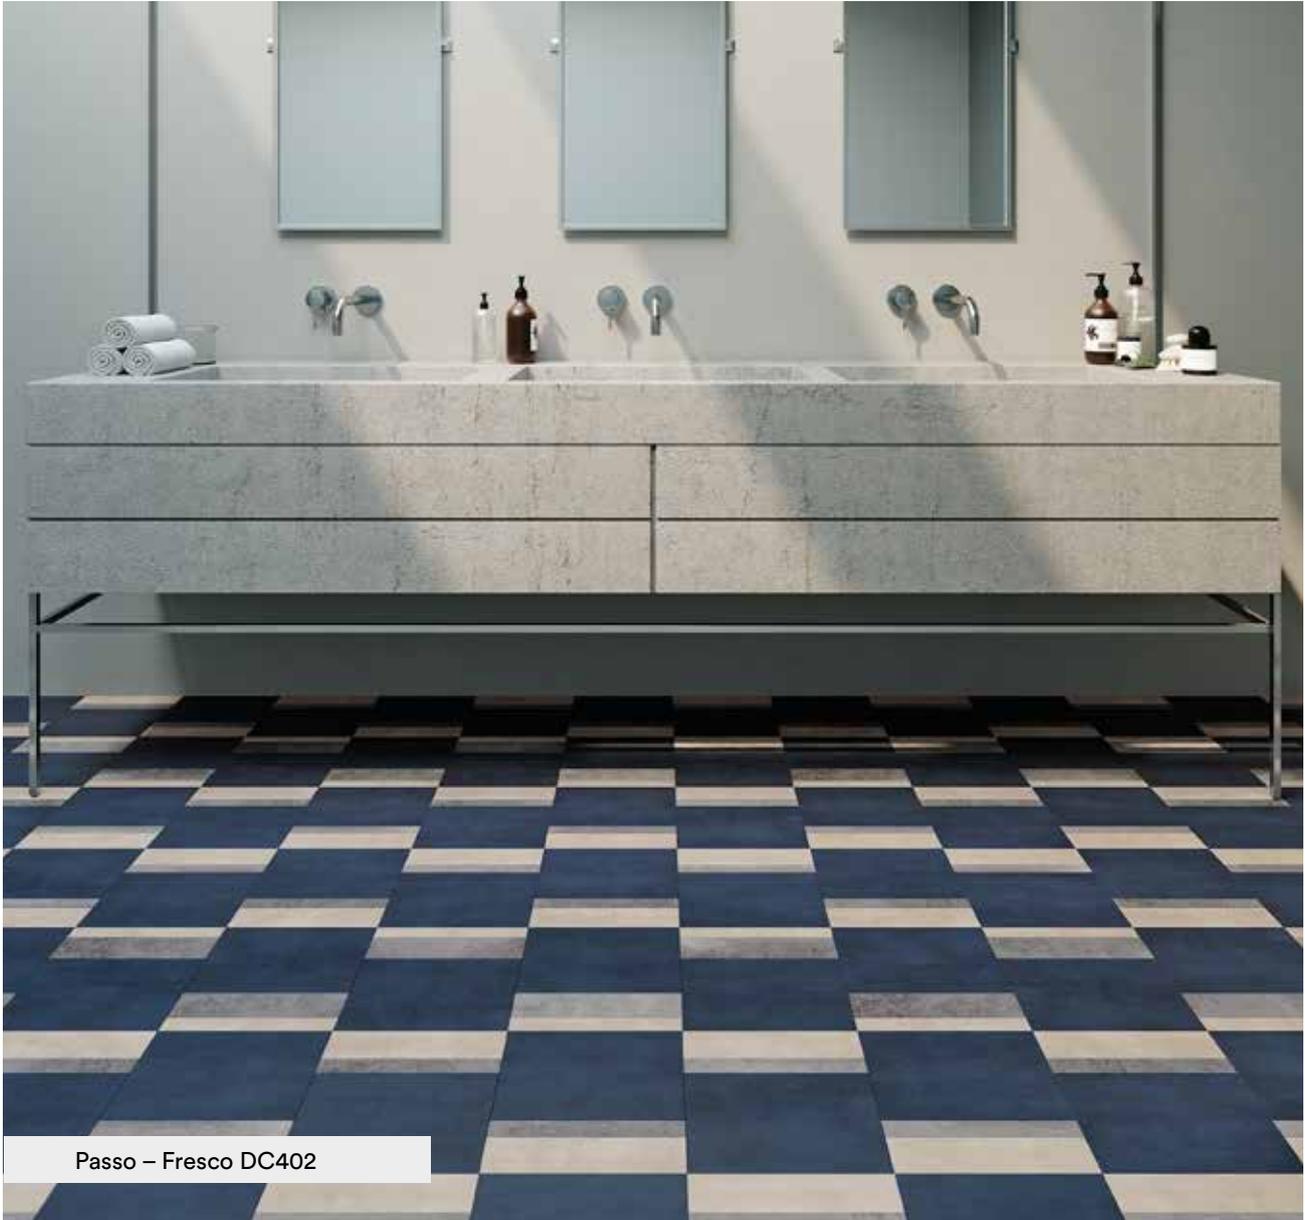

Passo – Fresco DC402


Available using 1 or 4 products.




Couture DC400



Fesco DC402



Mode DC398



Torsade DC401

# SIGNATURE – PLEAT



Available using 1 or 3 products.



Almond DC343



Dwell DC126



Tilt DC346



Venture DC344

# SIGNATURE – RIBBON PLEAT



Available using 1 product with stripping.



Angelica DC415



Annatto DC417



Sumac DC420



Verbena DC419

# SIGNATURE – STAGGERED BLOCK



Available using 1 product with stripping or 2 products without stripping..



Boutique DC144



Luxe DC148



Mall DC146



Vogue DC145

# SIGNATURE – WAVE PARQUET



Available using 3 products.



Bonnette DC387



Gottard DC385



Stelvio DC384



Susten DC383

# CARE AND MAINTENANCE



## AFTER INSTALLATION

- When replacing your furniture, lift rather than drag, and place back down with care. Apply felt pads to the feet of moveable furniture such as tables and chairs to reduce the risk of scratching. For particularly heavy items use furniture or castor cups to help spread the load to avoid indentation.
- Protect the floor when moving heavy items such as fridge freezers and washing machines.
- Use an entrance mat and an external mat to reduce the chance of dirt, grime and grit being walked onto your floor.

## REGULAR MAINTENANCE

- LVT is a low maintenance product however we would recommend dust mopping or sweeping with a soft brush day-to-day, and damp mopping the floor weekly.
- To damp mop, use Amtico Maintainer (dilute as recommended on the instructions), a traditional string mop and standard wringer bucket. Work backwards to the door in an “S shape” to mop. Rinse and wring the mop frequently.
- At least once a year the floor should be scrubbed thoroughly to remove in-grained dirt. Where dirt has become ingrained over time we would recommend that the floor is deep cleaned.
- Do not use steam cleaners.

## SPOT CLEANING

- Blot up accidental spillages as soon as possible with a clean absorbent cloth or paper towel using Amtico Spillage Remover or diluted Maintainer. Rinse and allow to dry thoroughly. Spills of water, grease, food, chemicals and other foreign matter or use of inappropriate cleaning products may cause the floor to become slippery.
- If vacuuming, dust mop first and check that nothing sharp is in contact with the floor which could get stuck under the vacuum and cause scratches.
- Light scuff and abrasion marks can be removed by applying Spillage Remover and gently rubbing with the Amtico cleaning pad or other similar non abrasive pads.
- Be careful when using furniture or glass polish as an overspray of silicone can make the surface slippery.





**Contact Us:**

P. 0800 377 753

F. 0800 377 754

W. [belgotex.co.nz](http://belgotex.co.nz)

**Flooring Design Centres:**

6-10 Akepiro Street, Mt Eden, Auckland

25 Leslie Hills Drive, Riccarton, Christchurch

The colours shown may vary slightly from the actual product and should be used as a guide only.

**Belgotex®**