

BJELIN



Woodura Planks ^{3.0} Accessories

EUROPEAN HARDENED TIMBER

5G Dry™ and Woodura™ is patented technology invented by Valinge Innovation AB. The logo is trademark owned by Valinge Innovation AB and authorised use of such mark is under license.




BJELIN

ACCESSORIES


AVAILABLE IN THE FOLLOWING COLOUR RANGE



Powder White




Misty White




Natural



Honey




Terra Brown



Shadow Brown



Earth Grey



Mineral Grey



Hard Smoked



REDUCER

This lacquered Reducer is crafted from spruce and responsibly sourced FSC-certified oak veneer available in all stocked colours.

Use the Reducer to transition between areas with varying room or floor levels.

Height 12mm

Width 42mm

Length 2400mm



T-MOULD

This lacquered T-Mould is crafted from spruce and responsibly sourced FSC-certified oak veneer available in all stocked colours.

The T-Mould offers an attractive transition, concealing joints between floor surfaces.

Height 10mm

Width 44mm

Length 2400mm



STAIR NOSING

Designed for closed staircases, crafted from FSC-certified oak in Croatia and patented by Välinge Innovation, available in all stocked colours.

Bjelin's stair nosing enhances the aesthetic appeal of your staircase.

Please note that this stair nosing is not compatible with Bjelin's engineered parquet flooring or engineered herringbone parquet. This stair nosing is designed to be installed with Woodura Planks 3.0 and is compatible with the 5G Dry floor locking system.

Height 80mm

Depth 18mm

Length 1000mm



BELGOTEX AQUA ELITE UNDERLAY

Aqua Elite is expertly engineered to reduce both reflected footfall and transmitted noise, creating a serene, peaceful environment. Compatible with underfloor heating and cooling systems, it ensures year-round comfort while offering a firm, luxurious feel underfoot when installed over a smooth, flat sub-floor. Aqua Elite not only enhances comfort, but can also improve the durability and performance of your flooring for years to come.


Roll Length 25m

Roll Width 1m

Thickness 2.5mm

Water Vapour Diffusion Resistance (SD) >75m

Compression Strength (CS) 109kPa

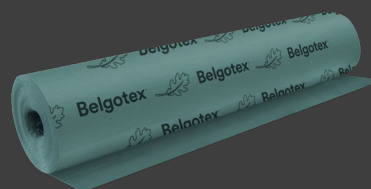

BELGOTEX AQUA PERFORMANCE UNDERLAY

Aqua Performance sets the standard for quality in floating floor underlays. At Belgotex, we prioritize indoor air quality, which is why we use only the finest materials to ensure a safe and healthy environment for you and your family. Built to last, Aqua Performance is guaranteed to protect your flooring investment for years to come, featuring an integrated vapour barrier and convenient peel-and-stick tape for easy installation.

Roll Length 50m

Roll Width 1m

Thickness 2.0mm

Water Vapour Diffusion Resistance (SD) >75m

Compression Strength (CS) 42kPa

Belgotex®

Bjelin Distributor

Contact Us

P 0800 377 753 | W belgotex.co.nz | E info@belgotex.co.nz



belgotexNZ



belgotex_nz



belgotex_NZ