

identity


by Belgotex®

solido elite WR

LAMINATE FLOATING FLOORS







identity

by Belgotex®

live in the moment

The right flooring choice will set the mood of a space and create moments of appreciation for design and interiors.

Solido Elite WR is inspired by nature, reflecting an atmosphere of rich structure, wildness, and unpredictability.

Made in Germany using the most modern of production methods in one of the world's largest laminate factories, our collection has options suitable for every floor space. Whatever your style or space we the perfect choice – from light Scandinavian floors to natural tones and even sophisticated dark tones.



features



DESIGNERS CHOICE

Solido Elite WR offers a choice of wood designs for a look you'll love.

The finest in style and durability with a selection to complement any colour palette for any space.




EMBOSSSED DESIGNS

Realistic embossed finishes with a 4 sided microbevel gives a textured finish whilst reducing noise and delivering excellent insulation and comfort underfoot.



SUITABLE FOR WET AREAS

Solido Elite WR is suitable for wet areas with wear, scratch and stain resistant qualities requiring low maintenance giving a fit for purpose and visually pleasing flooring solution.



NATURAL LOOK COLOUR SELECTION

Crafted to capture the elegance of nature with an appearance of beautiful natural woods for stunning interiors.



ENVIRONMENTALLY RESPONSIBLE

Manufactured under a quality and environmental system certified as complying with ISO 14001. Solido Elite WR receives the Blue Angel Certificate, an ecolabel which recognises products that are environmentally friendly and the entire life cycle of the product is taken into account and any impacts on the environment and health are fully considered during development.

The ISO 14001 is an internationally recognised standard that sets out the criteria for an environmental management system. It provides a guideline for hard flooring manufacturers on how to enhance their environment performance and manage their environmental responsibilities in a systematic manner that contributes to the environmental pillar of sustainability. Solido Elite WR also receives the criteria required for air quality, slip resistance, reaction to fire and acoustic performance.



colours



Dakota 52352



Seattle 52348



Boston 52355



Houston 52349



Memphis 52343



Georgia 52347



Oakland 52344




Denver 52357



locking system

Solido Elite WR's Megaloc Aqua Protect assembly system is based on the innovative Megaloc Aqua Protect solution. It is an effective barrier against water penetration. It is a simple, convenient and tool-free assembly system. One of the most important features that differentiates Solido Elite WR from other products is the Isowaxx® coating a sealant that prevents moisture from seeping into the joints of the flooring.

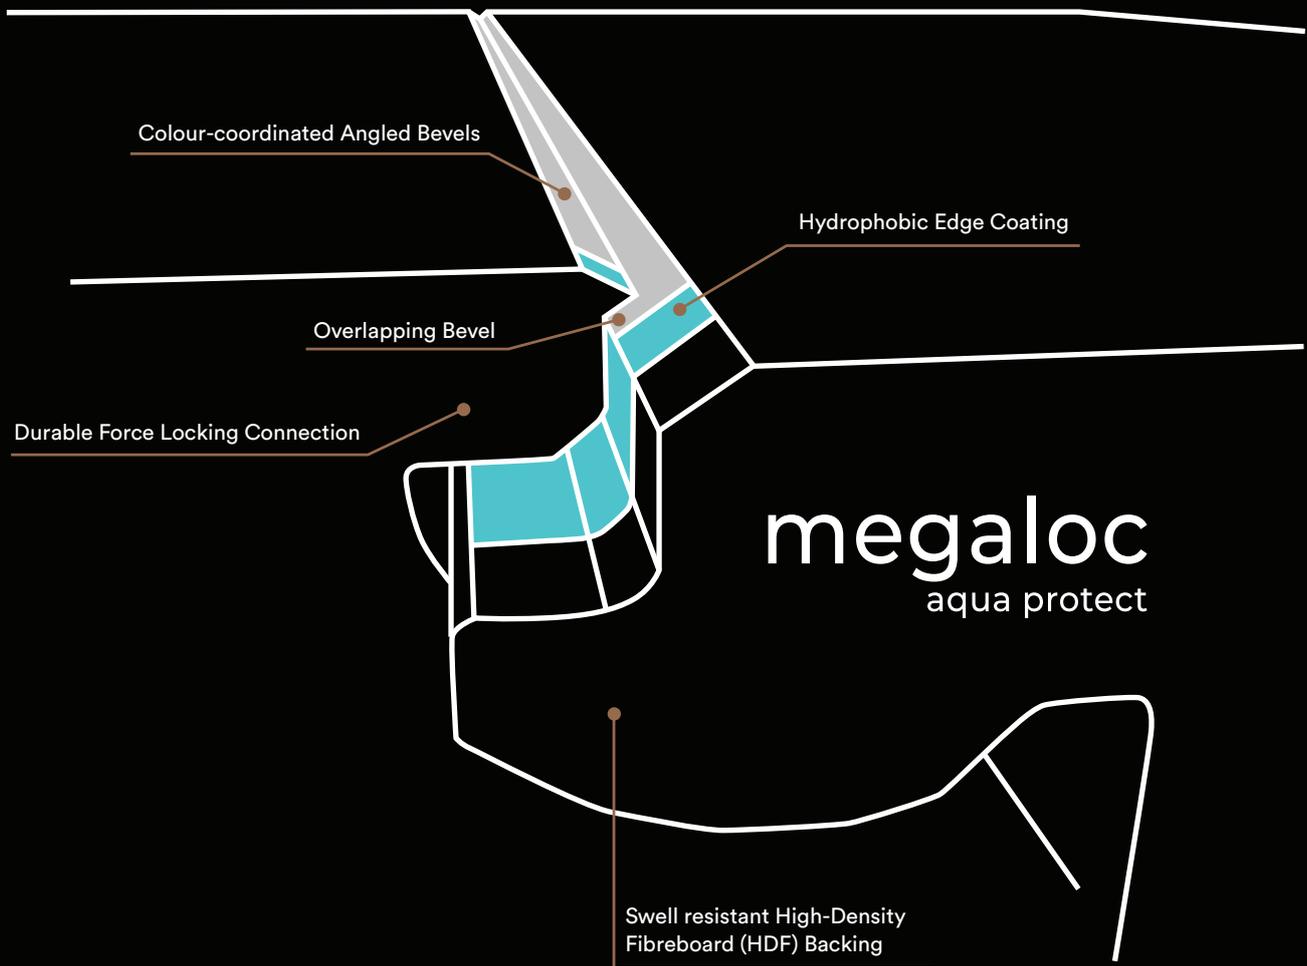



specifications



Designers
Choice



Embossed



Environmentally
Responsible



Suitable for
Wet Areas



Natural look
colour selection



4-sided
microbevel



Commercial
Warranty



Residential
Warranty



A+



GREENGUARD
Gold



BLUE ANGEL
THE GERMAN ECO LABEL

Construction	Classenboard HDF, High-density fibreboard (ML 2.0)
Locking System	Megaloc® Aqua Protect
Surface Protection	Isowaxx®
Finish	Embossed
Plank Size	192mm x 1285mm
Tiles per Carton	8pcs / 1.973m ²
Total Weight	7096g/m ²
Total Thickness	8.0mm
Wear Layer Thickness	0.1mm
Slip Resistance	DS (EN 13893)
Electrical Propensity	≤2kV (EN 1815)
Fire Rating	CRF ≥4.5kW/m ² (ISO 9239-1)
Surface Soundness	≥1.25N/mm ² (EN 311)
Thermal Insulation	≤0.07W/mK (EN 12667)
Underfloor Heating	Suitable
Wet Areas	Suitable (ISO 4760:2022)
Residual Indentation	≤0.05mm (EN ISO 24343-1)
Light Fastness	≥4 (EN ISO 4892-2)
Formaldehyde Group	E1 (EN 717-1)
Resistance to Staining	5 (group 1 and 2), 4 (group 3) - (EN 438)
Wear Resistance	IP ≥4000 cycles (AC4) - (EN 13329 Annex E)
Castor Chair Resistance	no damage with type W after 25 000 cycles (EN 425)
Impact Resistance	Small - diameter ball ≥ 12 N / Large - diameter ball ≥ 750 mm (EN 133329 Annex H)
Thickness Swelling	≤12% (ISO 24336)
Locking Strength	FI0.2 ≥1.0kN/mm / FS0.2 ≥2.0kN/mm (ISO 24334)
Movement of a Furniture Leg	No damage with type 0 (EN 424)
Abrasion Grade	AC 4
Classification	Class 32 Commercial Medium
Stair Rating	Suitable
Warranty	20 Year Residential Warranty / 10 Year Commercial Warranty
Environmental	Blue Angel Certified GREENGUARD Gold Certification A+ Emissions EN 14041



trim options



BOX EDGE 8mm

Anodised Aluminium Floor Finishing Trim for edge capping floating floors. Covers the expansion gap between the floor and walls, carpet, sliding doors and entrance mats.

COLOURS AVAILABLE

Champagne, Matt Black and Matt Silver



TIMBER ANGLE END 8mm

To match the Floating Floor Box Edge Trim.

COLOURS AVAILABLE

Champagne, Matt Black and Matt Silver



Distributed by Gilt Edge Industries Limited.



cleaning and maintenance

Solido Elite WR is low maintenance and has specially impregnated grooves and a hydroscopic coating to protect the timber planking and uses the glueless Megaloc® Aqua Protect assembly system that ensures a watertight seal between the planks.

Regular Cleaning

To clean sweep up any coarse dirt, dust and other dry particles using a dry soft broom and/or a vacuum cleaner with a hard floor attachment as required. Dirt particles which adhere to the flooring should be cleaned using a floor wipe or wrung-out mop.

General Instructions

- Areas in contact with furniture should be protected by using pressure absorbing underlays or furniture sliders to prevent surface damage.
- Chemicals of all kinds such as solvents, medicinal drugs, disinfection agents, hair dye, tea, fats, pencil, or marker ink can permanently stain your flooring.
- Avoid direct contact to the flooring of products manufactured using dyed rubber, such as dirt absorbing rubber mats, caps on furniture, dyed rubber furniture feet as they can stain your flooring.
- Avoid direct contact to the flooring of products manufactured using terracotta, such as plant pots.
- Avoid direct contact to the flooring with hot materials, such as cigarette ash, hot oils, radiant and fan heaters.
- Do not mix cleaning products, they may not be compatible.
- Clean your flooring product using clean equipment.

- Remove excess and water spills immediately to prevent slips and falls.
- Do not use heat or steam mops on your flooring.
- Do not drag furniture or heavy objects across the surface of your flooring.

Cleaning Frequency

All flooring is subject to natural wear in accordance with its use, regular cleaning and using approved cleaning products will keep your flooring looking and performing at its best for longer.

For flooring in low use areas, such as living rooms clean every 2-3 weeks or as required. For cleaning in moderate use areas, such as entrance and hallways clean every two weeks or as required. Heavy use areas, such as commercial installation clean weekly or as required.

The following substances can cause discolouration:

	ACTION
Asphalt	
Coco-Fibre Mats	Wipe immediately with
Crayons	a paper towel or cloth.
Lipstick	The area should then be
Nail Polish	washed using a damp
Paints containing acetone	cloth or sponge.
Permanent Marker Pens	
Rubber Mats	
Shoe Polish	
Solvent-based paints	
Spices	
Tar	
Varnish	



Belgotex®

CONTACT US

P. 0800 377 753

F. 0800 377 754

W. belgotex.co.nz



[belgotexNewZealand](https://www.facebook.com/belgotexNewZealand)



[belgotex_nz](https://www.instagram.com/belgotex_nz)



[belgotex_NZ](https://www.pinterest.com/belgotex_NZ)

The colours shown may vary slightly from the actual product and should be used as a guide only.