
Belgotex[•] LUXURYLAMINATE FLOATING FLOORS

SOLIDO ELITE WR | DYNAMIC XXL | AUTHENTIC XXL

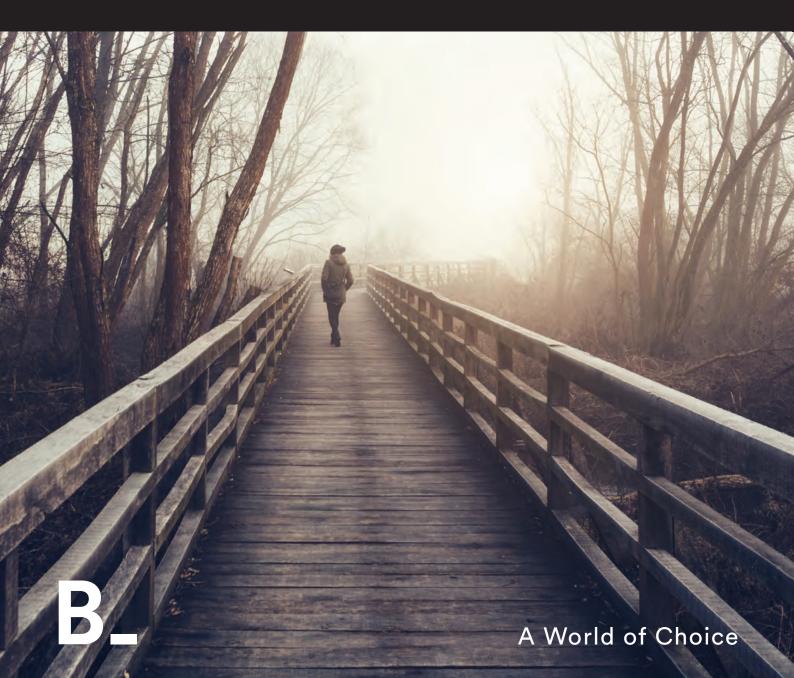


L U X U R Y L A M I N A T E F L O A T I N G F L O O R S

SOLIDO ELITE WR | DYNAMIC XXL | AUTHENTIC XXL

Our luxury laminate floating floor collection is inspired by nature, reflecting nature's atmosphere of rich structure, wildness, and unpredictability.

With three beautifully crafted ranges to choose from, made in Germany using the most modern of production methods in one of the world's largest laminate factories, our collection has options suitable for every floor space.

Whatever your style, or floor space we have choices; from light Scandinavian floors to natural tones and even sophisticated dark tones.

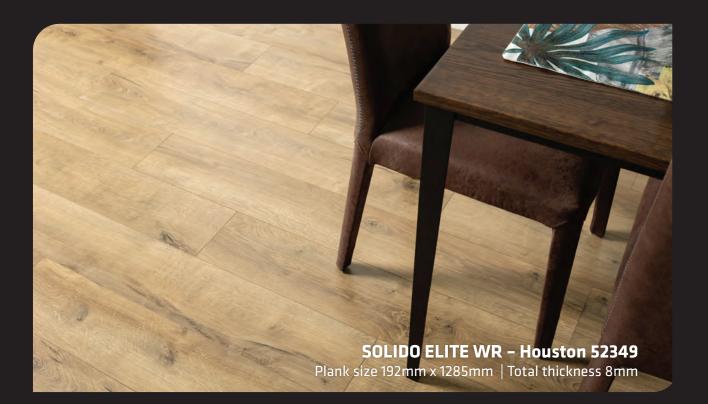

SOLIDO ELITE WR – Denver 52357 Plank size 192mm x 1285mm | Total thickness 8mm

SOLIDO ELITE WR

Solido Elite WR brings a wooden laminate flooring to life with precise attention to detail. Constructed with a Megaloc Aqua Protect locking system, this provides water resistance with an effective barrier against water penetration. This range also has an LLT anti scratch technology and reinforced top layer providing extraordinary resistance to wear and micro scratches making it durable and long lasting.













Dakota 52352

Seattle 52348

Boston 52355



Houston 52349



Memphis 52343

Georgia 52347



Oakland 52344



Denver 52357

4




SOLIDO ELITE WR LOCKING SYSTEM



Protect assembly system is based on the innovative Megaloc Aqua Protect

solution. It is an effective barrier against water penetration. It is a simple, convenient and tool-free assembly system.

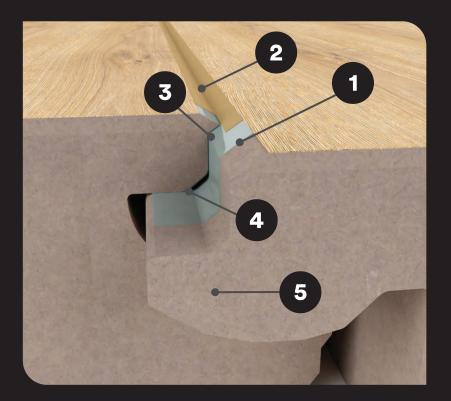

- 1. 2-fold edge hydrophobisation
- 2. Bevelled lacquer
- 3. Overlapping bevel

- 4. Durable force locking connection
- 5. Swelling-modified High Density Fibreboard (HDF)



One of the most important features that differentiates Solido Elite WR from other products is the Isowaxx[®] coating that all CLASSEN[®] laminate

flooring incorporates. In hot and humid climates Isowaxx® is definitely something all homeowners should not be without. Isowaxx® is a sealant that prevents moisture from seeping into the joints of the flooring.



SOLIDO ELITE WR – Georgia 52347 Plank size 192mm x 1285mm | Total thickness 8mm

1655010250

SOLIDO ELITE WR – Oakland 52344 Plank size 192mm x 1285mm | Total thickness 8mm

DYNAMIC XXL

Dynamic XXL brings the beauty of natural wood grain on a lavish scale. Embossed in register on an extra-large high density wooden laminate plank, with an elegant and genuine texture. Its Megaloc locking system between planks gives the laminate flooring a smooth and seamless surface that stays in place for years.



lvory 32962

Natural 32963

Anthracite 32961

DYNAMIC XXL - Anthracite 32961 Plank size 243mm x 2175mm | Total thickness 8mm

AUTHENTIC XXL

Authentic XXL is luxuriously grand in appearance and size. An extra-large wooden laminate flooring enhanced with in register embossing to deliver a realistic look and feel. Its Megaloc locking system between planks gives the laminate flooring a smooth and seamless surface that stays in place for years. This range is also suitable for heavy duty commercial applications leaving nothing to be desired.











Colatina 47579 Maraba 47566

Alvorado 47570

AUTHENTIC XXL – Colatina 47579 Plank size 243mm x 2175mm | Total thickness 12mm


AUTHENTIC XXL AND DYNAMIC XXL Locking system

megaloc

Patented quick laying technology. Simply position, click into place and you're done. You have never laid a laminate

floor faster or more easily than with the CLASSEN megaloc quick laying system. Easily lay a large floor area within a short space of time. It is the locking system between planks that gives the laminate flooring a smooth and seamless surface that stays in place for years.








Planks are installed in the V Groove shape. The shape of V-Groove flooring gives it a more natural look. The convex

shape and rounded edges make it seem like it is cut from hardwood instead of by a machine.

- 1. Protective layer providing exceptional resistance to high impact, scratches, and heavy load bearing.
- Decorative layer. Décor paper with a true-to-nature look and feel using high quality ink.
- 3. High Density Fibreboard (HDF) superior mechanical properties create extra dimensional stability and moisture resistance.
- 4. Underlay for stability and as a moisture barrier.



AUTHENTIC XXL – Alvorado 47570 Plank size 243mm x 2175mm | Total thickness 12mm

DYNAMIC XXL – Natural 32963 Plank size 243mm x 2175mm | Total thickness 8mm

AUTHENTIC XXL - Maraba 47566 Plank size 243mm x 2175mm | Total thickness 12mm

A the

TRIM RECOMMENDATIONS

SOLIDO ELITE WR (8mm) AND DYNAMIC XXL (8mm)

Floating Floor Box Edge 8mm

Anodised Aluminium Floor Finishing Trim for edge capping floating floors.

Covers the expansion gap between the floor and walls, carpet, sliding doors and entrance mats.

Colours Available

- $\cdot \, \text{Matt Silver}$
- · Champagne
- · Matt Black

Timber Angle End 8mm To match the Floating Floor

Box Edge trim.

Colours Available

- · Matt Silver
- · Champagne
- · Matt Black

AUTHENTIC XXL (12mm)

Floating Floor Box Edge 12.5mm Anodised Aluminium Floor Finishing Trim for edge capping floating floors.

Covers the expansion gap between the floor and walls, carpet, sliding doors and entrance mats.

Colours Available

- $\cdot \text{ Matt Silver}$
- · Champagne
- · Matt Black

Timber Angle End 12.5mm To match the Floating Floor Box Edge trim.

Colours Available

- · Matt Silver
- · Champagne
- Matt Black





Distributed by Gilt Edge Industries Limited.

ENVIRONMENTAL CREDENTIALS



Our laminate products are manufactured under a quality and environmental system certified as complying with ISO 14001. These ranges also receive the Blue Angel Certificate an ecolabel, which recognises products that are environmentally friendly and the entire life cycle of the product is taken into account and any impacts on the environment and health are fully considered during development.

The ISO 14001 is an internationally recognised standard that sets out the criteria for an environmental management system.

It provides a guideline for hard flooring manufacturers on how to enhance their environment performance and manage their environmental responsibilities in a systematic manner that contributes to the environmental pillar of sustainability.

All of our laminate products also receive the criteria required for air quality, slip resistance, reaction to fire and acoustic performance. These are available to view or download from our website.



CLEANING AND MAINTENANCE

REGULAR CLEANING

- Dry sweep or vacuum the floor weekly or more often, depending on the amount of dirt and foot traffic. The floor may be damp mopped if required. Use a clean mop, warm water and a neutral pH detergent; Wring out the mop as dry as possible.
- Always remove excess water. It can cause slip and fall hazards.
- Do not use soap-based detergents, caustic cleaners or abrasive cleaners.
- The use of a steam mop will void all warranties.

PREVENTIVE MEASURES AND TIPS ON CARE

- The use of wide-based plastic furniture protectors is also highly recommended to prevent scratching and indentation from furniture legs.
- Never drag furniture or appliances across you floor. If using a trolley to move heavy object, do not forgot to protect your floor.
- Avoid hard plastic wheels of any type on your floor. Regular cleaning and the timely removal of abrasive dirt and stains greatly reduces the amount of cleaning required and prolongs the appearance and life of your laminate floor.
- Never wet mop the floor or allow pools of water to sit for any length of time. Do not allow water to stand on the joints for long periods of time either. Do not steam clean or steam mop your floor.

- Vacuum cleaning and sweeping are helpful for removing dust and dirt prior to mopping, cleaning up accidents and for places where the mop can't reach. Avoid using waxes and polishes which leave residues attracting more dirt.
- Mop up any spillages and treat stains immediately using an appropriate cleaning solution.
- Regular light maintenance is more cost effective than periodic heavy maintenance and more beneficial to the floor covering.
- Always sweep, mop, or dry vacuum the floor regularly.
- Always use clean equipment dirty equipment only redistributes the dirt.
- Do not mix cleaning products from different manufacturers – they may not be compatible.
- Always remove any spillage immediately.
- Always remove excess water.
- Always take precautions to prevent dark rubber from coming into contact with the floor.
- Never deviate from the manufacturer's recommended dilution rates.
- Wet floors are slippery; always use warning signs to advise that cleaning is in progress.

Regular cleaning is more beneficial to the floor covering and more cost effective than occasional heavy cleaning.

SPOT PROTECTION AND REMOVAL

- Chemicals of all kinds such as solvents, medicinal drugs and disinfection agents, hair dye, tea, fats, pencil or marker ink etc, can permanently stain the floorings.
- Direct contact of the floorings with material made of dyed rubber, such as dirt absorbing mats or rubber caps on devices, chair or table legs, can permanently stain the floorings. Contact points should therefore be protected. This should also be done with products made of terracotta.
- Direct sunlight as well as intensive artificial light may cause discolouration of all floorings. Protect your floor by using window tinting, curtains, blinds, and/or awnings.
- Most domestic agents will not harm the floor, however all residue of cleaning agents should be removed to avoid discolouration.

SUBSTANCES THAT CAUSE DISCOLOURATION	ACTION TO TAKE
Asphalt	
Coco-Fibre Mats	
Crayons	
Lipstick	
Nail Polish	
Paints containing Acetone	1. Wipe immediately with a paper towel or cloth
Permanent Marker Pens	2. The area should then be washed using a damp cloth or sponge
Rubber Mats	
Shoe Polish	
Solvent-based Paints	
Spices	
Tar	
Varnish	

Contact Us: P. 0800 377 753 F. 0800 377 754

W. belgotex.co.nz



P 0 belgotexNZ belgotex_nz belgotex_NZ

The colours shown may vary slightly from the actual product and should be used as a guide only.

Belgotex