Decofresc
All public contemporary frescoes
33 colours

DECOFRESC

Bs2d0

ALL PUBLIC CONTEMPORARY DECORATIVE PROTECTION FRESCO

Applications
The contemporary Decofresc decorative frescoes provide an attractive setting in public buildings.
They bring a touch of elegance and customization while protecting walls and they meet hygiene and impact resistance requirements.

Description
- Model: all public contemporary Decofresc decorative protection fresco
- Standard panel dimensions: 3 m x 1.30 m indivisible
- Thickness : 2 mm
- Material: antibacterial and Bs2d0 fire-rated PVC, solid colour
- Surface finish: slightly textured ("Optimixt" grain*)
- Fixing: adhesive bonding with SPM acrylic glue or SPM universal mastic glue. Joints between panels can be made using silicone joints or PVC welding rods, colour matched to the range.
- Colours: 33 standard.

**"Optimixt" grain: optimal combination of scratch resistance, hygiene and aesthetic.*

Specification
- Description: decorative protection fresco (Cloud or Wave Decofresc as manufactured by SPM) from rigid and antibacterial PVC achieving Bs2d0 fire rating with solid colour and slightly textured surface (Optimixt grain as manufactured by SPM). 3 m long, 1.30 m high (indivisible), 2 mm thick.
- Environment: no heavy metals and no substance potentially subjected to any REACH restriction are used in its manufacture, nor PBT/BPA. The calcium-zinc thermal stabilisation process is used. The emission level of volatile substance in inside air has been tested according to ISO 16000-6 and is very low (A+) according to the French regulation (23 March 2011 nr 2011-321 Decree and 19 April 2011 Order). 100% of the product are recyclable.
- Colour: selected by architects from manufacturer's standard range
- Installation method: glue as per manufacturer's instructions.

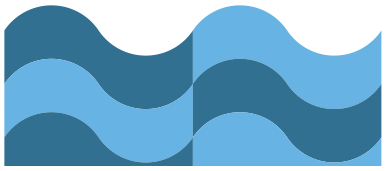
Wave

Cloud

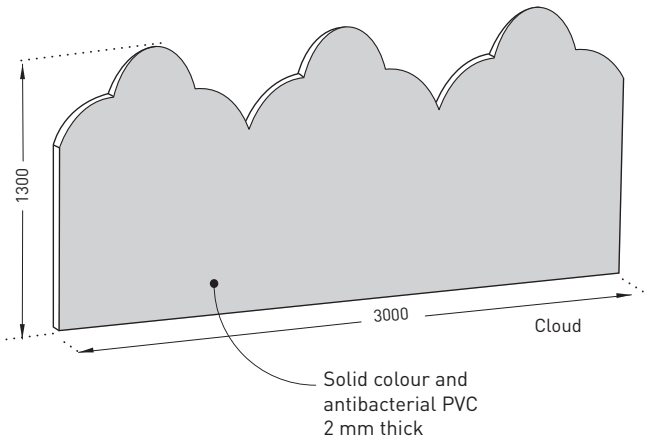

Frescoes made from cut-to-size Decochoc panels.

Decofresc
Easy childhood frescoes
3 themes

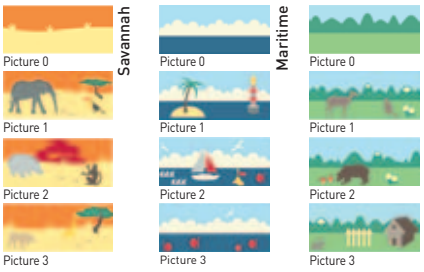

DECOFRESC

Bs2d0

EARLY CHILDHOOD DECORATIVE PROTECTION FRESCO

Applications
The early childhood Decofresc decorative frescoes are especially designed to brighten up and durably protect walls in establishments who hope to create an attractive, welcoming atmosphere that stimulates children's imagination. They meet the constraints linked to the early childhood: hygiene and impact resistance.

Description
- Model: early childhood Decofresc decorative protection fresco
- Standard panel dimensions: 3 m x 1.30 m indivisible
- Thickness : 2 mm
- Material: antibacterial and Bs2d0 fire-rated PVC, solid colour
- Surface finish: slightly textured ("Optimixt" grain*)
- Fixing: adhesive bonding with SPM acrylic glue or SPM universal mastic glue. Joints between panels can be made using silicone joints or PVC welding rods, colour matched to the range.
- Colours: 3 themes each with 4 pictures (fixed colours).

**"Optimixt" grain: optimal combination of scratch resistance, hygiene and aesthetic.*

Specification
- Description: decorative protection fresco (Savannah, Maritime or Altitude Decofresc as manufactured by SPM) from rigid and antibacterial PVC achieving Bs2d0 fire rating with solid colour and slightly textured surface (Optimixt grain as manufactured by SPM). 3 m long, 1.30 m high (indivisible), 2 mm thick.
- Environment: no heavy metals and no substance potentially subjected to any REACH restriction are used in its manufacture, nor PBT/BPA. The calcium-zinc thermal stabilisation process is used. The emission level of volatile substance in inside air has been tested according to ISO 16000-6 and is very low (A+) according to the French regulation (23 March 2011 nr 2011-321 Decree and 19 April 2011 Order). 100% of the product are recyclable.
- Colour: selected by architects from manufacturer's standard range
- Installation method: glue as per manufacturer's instructions.

Altitude theme (4 pictures)

Savannah theme (4 pictures)

Maritime theme (4 pictures)

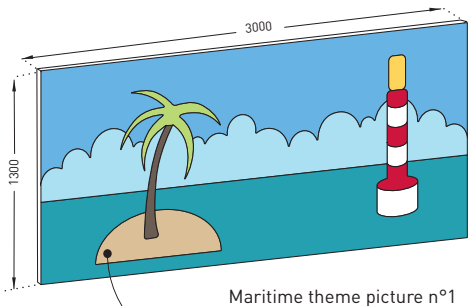

Maritime theme picture n°1

Solid colour and antibacterial PVC 2 mm thick

Frescoes made from cut-to-size Decochoc panels.
Delivered flat and pre-assembled, they are to bring together when installing and not fit on curved walls.